PCD

PCD

KYOCERA diamond material is a synthetic diamond sintered under high temperatures and pressures. PCD (Polycrystalline diamond) is ideal for non-ferrous metals and non-metals.

FEATURES

- Applicable for non-ferrous metals, non-metals turning, milling and other various type of cutting
- Long tool life due to extreme hardness
- Capable of high cutting speeds which increases cutting productivity
- Reduced edge build-up allows for high precision cutting
- Diversified applications for cutting of non-ferrous materials and non-metals
- Finished surface will be rainbow colored.

(a mirror-like finished surface will not be obtained when single crystal diamond is used.)


FEATURES OF PCD								
Material	Description	Av. Grain Size (µm)	Advantages					
Non-Ferrous Materials	KPD001	0.5	- Super Micro-Grain PCD features cutting edge strength, wear resistance, fracture resistance, good edge-sharpening performance and long, stab-Application: High speed cutting of aluminum alloys, brass, non-ferrous metals and non-metals including plastics, fiberglass, carbide and ceramic					
	KPD010	10	Good wear resistance and toughness, good grindability Application: General purpose, high speed cutting of aluminum alloys, non-ferrous metals and non-metals including plastics, fiberglass, carbide and ceramics.					
	KPD230	2-30	Superior abrasive wear resistance and toughness due to high density PCD with mixed rough and fine grains Application: High speed milling of aluminum alloys, non-ferrous metals, plastics and fiberglass					

Applications

Н


Workpiece Material		(Alumin		ıs materials us metals / Non-	metals)	Titanium / Titanium alloys			
Cutting Range		Finishing <			Roughing	Finishing Roughing			
Classification		N01	N10	N20	N30	S01	S10	S20	S30
Turning Milling	PCD	KPD001 KPD010 KF	PD230			KPD001	KPD230		

Application Map



Finishing ← Fracture Resistance → Roughing

Surface Finish Roughness Comparison of Aluminum Cutting

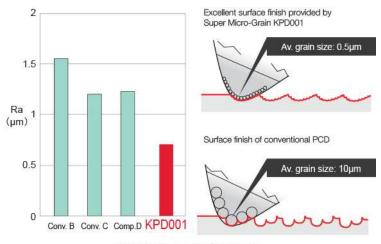

(Grain size affects surface finish quality)