


■ DRZ (Drilling Depth : 3 x D) Metric Dimension



Description	Stock	No. of Insert	Dimension (inch)						Max. Offset (Radial)	Spare Parts			Applicable Inserts ➔ Page 6	
			ØD	L1	L2	L3	Ød	Ød1		Rc	Insert Screw	Wrench		Plug
S20 -DRZ1339-05	○	2	13	108	65	39	20	27	Rc 1/8	+0.5	SB-2045TR	FT-6	GP-1	ZCMT050203 ZCMT050203SP ZCMT050203SU
-DRZ135405-05	○		13.5	108	65	40.5				+0.5				
-DRZ1442-05	○		14	112	69	42				+0.5				
-DRZ145435-05	○		14.5	112	69	43.5				+0.5				
-DRZ1545-05	○		15	115	72	45				+0.5				
-DRZ155465-05	○		15.5	115	72	46.5				+0.5				
S25 -DRZ1648-06	○	2	16	131	77	48	25	32	Rc 1/8	+1.1	SB-2260TR	DT-7	GP-1	ZCMT06T204 ZCMT06T204SP ZCMT06T204SU
-DRZ165495-06	○		16.5	131	77	49.5				+0.9				
-DRZ1751-06	○		17	133	79	51				+0.8				
-DRZ175525-06	○		17.5	133	79	52.5				+0.7				
-DRZ1854-06	○		18	136	82	54				+0.6				
-DRZ185555-06	○		18.5	136	82	55.5				+0.6				
-DRZ1957-06	○		19	139	85	57				+0.5				
-DRZ195585-06	○		19.5	139	85	58.5				+0.5				
-DRZ2060-06	○		20	143	89	60				+0.5				
-DRZ205615-06	○		20.5	146	92	61.5				+0.3				
-DRZ2163-06	○		21	146	92	63				+0.2				
-DRZ215645-08	○		21.5	147	93	64.5				+1.8				
-DRZ2266-08	○		22	147	93	66				+1.6				
-DRZ225675-08	○		22.5	147	93	67.5				+1.4				
-DRZ2369-08	○	23	150	96	69	+1.3								
-DRZ235705-08	○	23.5	150	96	70.5	+1.2								
-DRZ2472-08	○	24	152	98	72	+1.1								
-DRZ245735-08	○	24.5	152	98	73.5	+0.9								
-DRZ2575-08	○	25	155	101	75	+0.8								
-DRZ255765-08	○	25.5	155	101	76.5	+0.7								
-DRZ2678-08	○	26	158	104	78	+0.6								
-DRZ265795-08	○	26.5	158	104	79.5	+0.5								
S32 -DRZ2781-10	○	2	27	173	114	81	32	42	Rc 1/4	+2.5	SB-4085TR	DT-15	GP-2	ZCMT10T304 ZCMT10T304SP
-DRZ275825-10	○		27.5	173	114	82.5				+2.3				
-DRZ2884-10	○		28	176	117	84				+2.2				
-DRZ285855-10	○		28.5	176	117	85.5				+2.1				
-DRZ2987-10	○		29	179	120	87				+2.0				
-DRZ295885-10	○		29.5	179	120	88.5				+1.8				
-DRZ3090-10	○		30	181	122	90	+1.7							
-DRZ305915-10	○		30.5	181	122	91.5	+1.5							
-DRZ3193-10	○		31	183	124	93	+1.5							
-DRZ315945-10	○		31.5	183	124	94.5	+1.3							
-DRZ3296-10	○		32	187	128	96	+1.2							
-DRZ325975-10	○		32.5	187	128	97.5	+1.0							
-DRZ3399-12	○		33	193	134	99	+2.9							
-DRZ34102-12	○		34	197	138	102	+2.7							
-DRZ35105-12	○		35	199	140	105	+2.4							
-DRZ36108-12	○		36	203	144	108	+2.2							
-DRZ37111-12	○		37	205	146	111	+1.9							
-DRZ38114-12	○		38	208	149	114	+1.7							
-DRZ39117-12	○	39	211	152	117	+1.4								
-DRZ40120-12	○	40	212	153	120	+1.2								
-DRZ350855-12	○	2	35	199	140	105	32	55	Rc 1/4	+2.9	SB-5085TR	DT-20	GP-2	ZCMT12T306 ZCMT12T304SP
-DRZ36108-12	○		36	203	144	108				+2.2				
-DRZ37111-12	○		37	205	146	111				+1.9				
-DRZ38114-12	○		38	208	149	114				+1.7				
-DRZ39117-12	○		39	211	152	117				+1.4				
-DRZ40120-12	○		40	212	153	120				+1.2				

• When offset machining, reduce feed rate to f=0.08mm/rev (0.003ipr) or less.

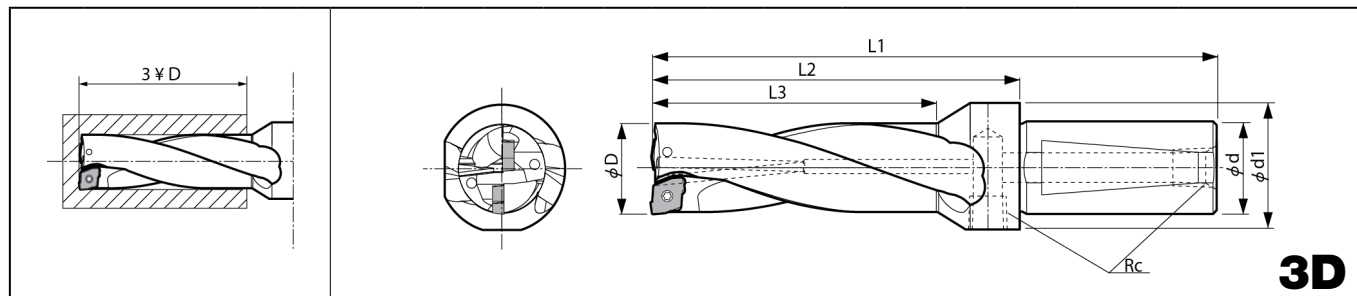