




■ DRZ (Drilling Depth : 4 x D) Metric Dimension

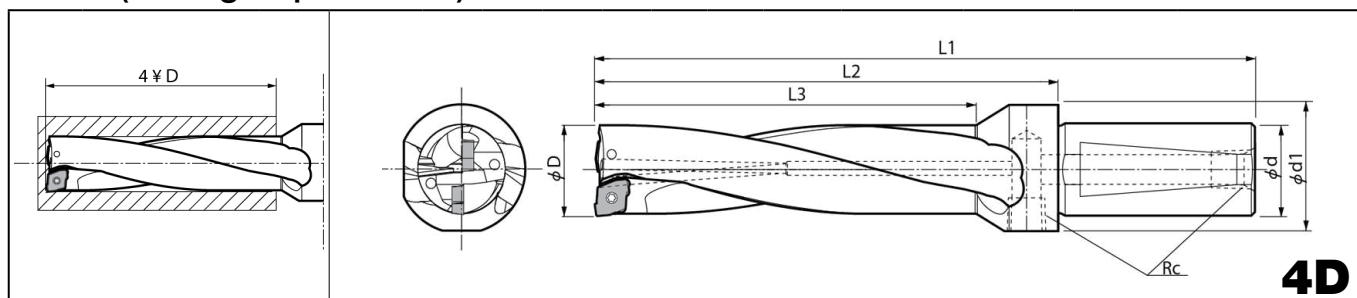

Description	Stock	No. of Insert	Dimension (mm)						Max. Offset (Radial)	Spare Parts			Applicable Inserts Page 6		
			ØD	L1	L2	L3	Ød	Ød1		Rc	Insert Screw	Wrench		Plug	
S20 -DRZ1352-05	○	2	13	121	78	52	20	27	Rc 1/8	+0.5	SB-2045TR	FT-6	GP-1	ZCMT050203 ZCMT050203SP ZCMT050203SU	
-DRZ135540-05	○		13.5	123	79	54									+0.5
-DRZ1456-05	○		14	126	83	56									+0.5
-DRZ145580-05	○		14.5	127	84	58									+0.5
-DRZ1560-05	○		15	130	87	60									+0.5
-DRZ155620-05	○	15.5	131	88	62	+0.5									
S25 -DRZ1664-06	○	2	16	147	93	64	25	32	Rc 1/8	+1.1	SB-2260TR	DT-7	GP-1	ZCMT06T204 ZCMT06T204SP ZCMT06T204SU	
-DRZ165660-06	○		16.5	146	93	66									+0.9
-DRZ1768-06	○		17	149	95	68									+0.8
-DRZ175700-06	○		17.5	147	97	70									+0.7
-DRZ1872-06	○		18	153	99	72									+0.6
-DRZ185740-06	○		18.5	155	101	74									+0.6
-DRZ1976-06	○		19	157	103	76									+0.5
-DRZ195780-06	○		19.5	159	105	78									+0.5
-DRZ2080-06	○		20	156	102	80									+0.5
-DRZ205820-06	○		20.5	163	113	82									+0.2
-DRZ2184-06	○	21	161	107	84	+0.2									
-DRZ215860-08	○	21.5	169	115	86	+1.8	Rc 1/8	SB-2570TR	DT-8	GP-1	ZCMT080304 ZCMT080304SP				
-DRZ2288-08	○	22	169	115	88	+1.6									
-DRZ225900-08	○	22.5	169	115	90	+1.4									
-DRZ2392-08	○	23	173	119	92	+1.3									
-DRZ235940-08	○	23.5	173	118	94	+1.0									
-DRZ2496-08	○	24	176	122	96	+1.1									
-DRZ245980-08	○	24.5	177	123	98	+0.9									
-DRZ25100-08	○	25	180	126	100	+0.8									
-DRZ2551020-08	○	25.5	181	127	102	+0.7									
-DRZ26104-08	○	26	184	130	104	+0.6									
-DRZ2651060-08	○	26.5	185	131	106	+0.5									
S32 -DRZ27108-10	○	2	27	200	141	108	32	42	Rc 1/4	+2.5	SB-4085TR	DT-15	GP-2	ZCMT10T304 ZCMT10T304SP	
-DRZ2751100-10	○		27.5	201	142	110									+2.3
-DRZ28112-10	○		28	204	145	112									+2.2
-DRZ2851140-10	○		28.5	204	146	114									+2.1
-DRZ29116-10	○		29	208	149	116									+2.0
-DRZ2951180-10	○		29.5	209	150	118									+1.8
-DRZ30120-10	○		30	211	152	120									+1.7
-DRZ3051220-10	○		30.5	212	153	122									+1.6
-DRZ31124-10	○		31	214	155	124									+1.5
-DRZ3151260-10	○		31.5	216	157	126									+1.3
-DRZ32128-10	○	32	219	160	128	+1.2									
-DRZ3251300-10	○	32.5	220	161	130	+1.1									
-DRZ33132-12	○	2	33	236	167	132	32	55	Rc 1/4	+2.9	SB-5085TR	DT-20	GP-2	ZCMT12T306 ZCMT12T304SP	
-DRZ34136-12	○		34	231	172	136									+2.7
-DRZ35140-12	○		35	234	175	140									+2.4
-DRZ36144-12	○		36	239	180	144									+2.2
-DRZ37148-12	○		37	242	183	148									+1.9
-DRZ38152-12	○		38	246	187	152									+1.7
-DRZ39156-12	○		39	250	191	156									+1.4
-DRZ40160-12	○		40	252	193	160									+1.2

• When offset machining, reduce feed rate to f=0.08mm/rev (0.003ipr) or less.