




## Holeshot Drills

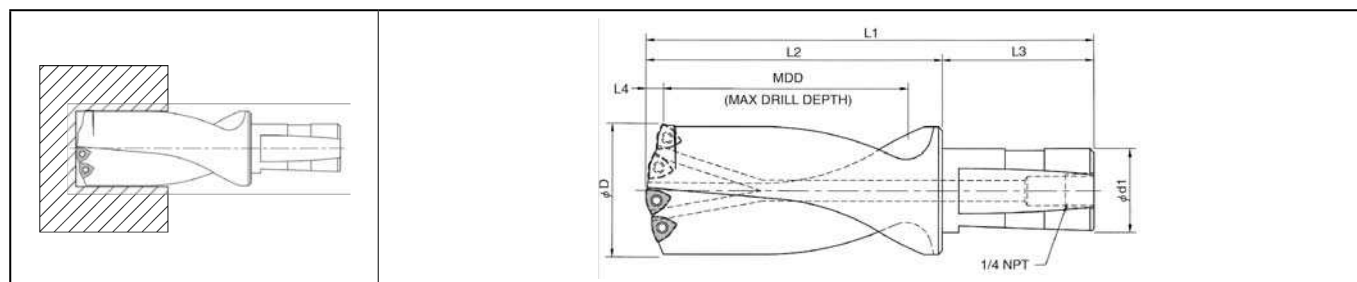

### ● Toolholder Dimensions

Description	Stock	No. of Insert	Dimension (inch)							Spare Parts		Applicable Inserts ● Page 53
			ØD	Ød1	MDD	L1	L2	L3	L4	Clamp Screw	Wrench	
												
DR -1496	●	2	1.496 (38mm)	1.000	2.75	5.78	3.50		.204	SCR30	T10	WCMX 06T308-M1(A)
-1496-X3N	●		1.496 (38mm)	1.250	4.49	7.76	5.48		.204			
-1500	●		1.500	1.000	2.75	5.78	3.50		.204			
-1500-X3N	●		1.500	1.250	4.50	7.73	5.45		.204			
-1531	●		1.531	1.250	2.88	6.16	3.88	2.28	.208			
-1531-X3N	●		1.531	1.250	4.59	8.08	5.80		.208			
-1535-X3N	●		1.535 (39mm)	1.250	4.61	8.08	5.80		.209			
-1562	●		1.562	1.250	2.88	6.16	3.88		.212			
-1562-X3N	●		1.562	1.250	4.68	8.17	5.89		.212			
DR -1575	●	3	1.575 (40mm)	1.250	2.88	6.16	3.88	2.28	.208	SCR03	T9	WCMX 050308-M1(A)
-1575-X3N	●		1.575 (40mm)	1.500	4.72	8.61	5.92	2.69	.208			
-1594	●		1.594	1.250	2.88	6.16	3.88	2.28	.210			
-1594-X3N	●		1.594	1.500	4.78	8.68	5.99	2.69	.210			
-1614	●		1.614 (41mm)	1.250	2.88	6.16	3.88	2.28	.212			
-1614-X3N	●		1.614 (41mm)	1.500	4.84	8.73	6.04	2.69	.212			
-1625	●		1.625	1.250	2.88	6.16	3.88	2.28	.214			
-1625-X3N	●		1.625	1.500	4.87	8.77	6.08	2.69	.214			
-1656	●		1.656	1.250	2.88	6.16	3.88	2.28	.218			
-1656-X3N	●		1.656	1.500	4.96	8.87	6.18	2.69	.218			
-1687	●		1.687	1.250	2.88	6.16	3.88	2.28	.221			
-1687-X3N	●		1.687	1.500	5.06	8.97	6.28	2.69	.221			
-1693	●		1.693 (43mm)	1.250	2.88	6.16	3.88	2.28	.222			
-1693-X3N	●		1.693 (43mm)	1.500	5.08	8.97	6.28	2.69	.222			
-1719	●		1.719	1.250	3.00	6.41	4.13	2.28	.225			
-1719-X3N	●		1.719	1.500	5.15	9.20	6.51	2.69	.225			
-1732	●	4	1.732 (44mm)	1.250	3.00	6.41	4.13	2.28	.224	SCR03	T9	WCMX 050308-M1(A)
-1732-X3N	●		1.732 (44mm)	1.500	5.20	9.29	6.60	2.69	.224			
-1750	●		1.750	1.250	3.00	6.41	4.13	2.28	.225			
-1750-X3N	●		1.750	1.500	5.25	9.30	6.61	2.69	.225			
-1772	●		1.772 (45mm)	1.250	3.00	6.41	4.13	2.28	.231			
-1772-X3N	●		1.772 (45mm)	1.500	5.31	9.42	6.73	2.69	.231			
-1781	●		1.781	1.250	3.00	6.41	4.13	2.28	.223			
-1781-X3N	●		1.781	1.500	5.34	9.38	6.69	2.69	.223			
-1812	●		1.812	1.250	3.00	6.41	4.13	2.28	.230			
-1812-X3N	●		1.812	1.500	5.43	9.48	6.79	2.69	.230			
-1844	●		1.844	1.250	3.38	6.78	4.50	2.28	.233			
-1844-X3N	●		1.844	1.500	5.53	9.58	6.89	2.69	.233			
-1850	●		1.850 (47mm)	1.250	3.38	6.78	4.50	2.28	.233	SCR03	T9	WCMX 050308-M1(A)
-1850-X3N	●		1.850 (47mm)	1.500	5.55	9.66	6.97	2.69	.233			

