


для заказа - kyocera@kyocera-tools.ru

STGC(P) (External)





STGC(P)R/L 1010F-11
shown above

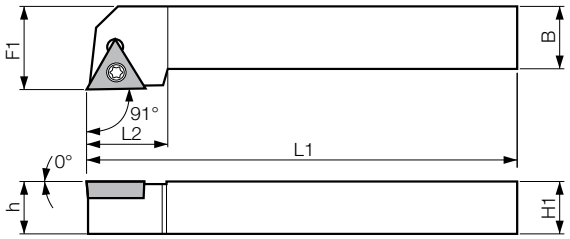

• Right-hand Shown

Toolholder Dimensions

Part Number		Stock		Dimensions (mm)					Standard Corner-R(rε)	Spare Parts	
										Clamp Screw	Wrench
		R	L	H1=h	B	L1	L2	F1			
STGCR/L	0808E-08	○	○	8	8	70	12	10	0.2	SB-2050TR	FT-6
	1010F-08	○	○	10	10	80	12	12			
STGCR/L	1010F-11	○	○	10	10	80	15	14	0.4	SB-2570TR	FT-8
	1212H-11	○	○	12	12	100	15	16			
	1616H-11	○	○	16	16	100	15	20			
	2020K-11	○	○	20	20	125	15	25			
	2525M-11	○	○	25	25	150	20	32			
STGPR/L	0808E-08	○		8	8	70	12	10	0.2	SB-2050TR	FT-6
	1010F-08	○	○	10	10	80	12	12			
STGPR/L	1010F-11	○	○	10	10	80	15	14	0.2	SB-3080TR	FT-10
	1212H-11	○	○	12	12	100	15	16			
	1616H-11	○	○	16	16	100	15	20			

Applicable Inserts (STGC)

Application	Low Feed	Low Feed / Precision	Cast Iron	Non-ferrous Metals	Non-ferrous Metals
Ref. Page	➡ B69	➡ B69	➡ B70	➡ B69	➡ C26
Insert / Toolholder	(E/F) R/L-U 	FR/L-USF 	Without Chipbreaker 	R/L-A3 	PCD 
STGCR/L..-08	TCGT1515..	TCET1515..	TCGW1515..	-	TCMT1515..
STGCR/L..-11	TCGT22..	TCET22..	TCGW22..	TCGT22..	TCMT22.. TCGW22..

Applicable Inserts (STGP)

Application	Minute D.O.C.	Finishing	Finishing-Medium	Finishing	Finishing / Precision	Low Feed / Precision	Medium	Low Carbon Steel / Finishing	Low Carbon Steel / Finishing-Medium	Cast Iron
Ref. Page	➡ B71	➡ B71	➡ B71	➡ B72	➡ B73	➡ B73	➡ B73	➡ B71	➡ B72	➡ B74
Insert / Toolholder	CF 	PP 	HQ 	R/L 	R/L-FSF 	FR/L-USF 	R/L-H 	XP 	XQ 	Without Chipbreaker 
STGPR/L..-08	TPGT1515..	-	-	TPGH1515..	TPET1515..	TPET1515..	-	-	-	TPGB1515..
STGPR/L..-11	-	TPMT22..	TPMT22..	TPGH22..	TPET22..	TPET22..	TPGH22..	TPMT22..	TPMT22..	TPGB22..

Application	Non-ferrous Metals	Hard Materials
Ref. Page	➡ C26 ~ C28	➡ C16
Insert / Toolholder	PCD 	CBN 
STGPR/L..-08	TPMH1515.. TPGB1515..	TPGB1515..
STGPR/L..-11	TPMH22.. TPGB22..	TPGB22..

Recommended Cutting Conditions ➡ **E46**

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)