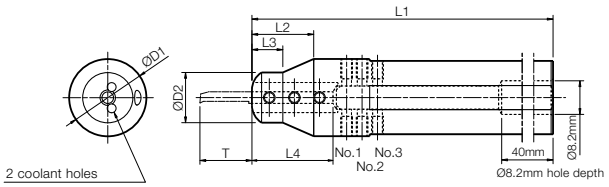
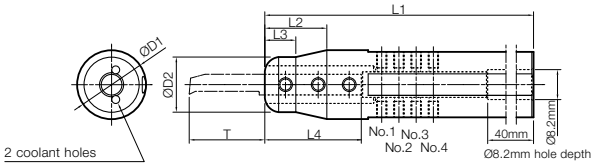
для заказа - kyocera@kyocera-tools.ru

NEW ITEMS!

EZH-CT (Sleeve) NEW

With Coolant Hole and EZ Adjust Structure






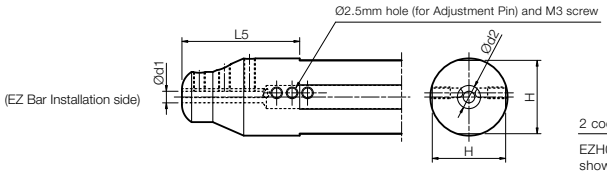


Fig.2



EZH07..CT coolant hole shape is as shown on the figure above.

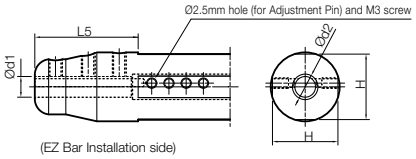


Fig.3

Part Number		Stock	Dimensions (mm)										T (mm) Overhang Length of Bar ※2				Drawing	Applicable EZ Bar or EZ Bar PLUS ➡ F16~F18 ➡ F20~F21 ➡ G48, G76 ➡ J28
			Ød1	ØD1	ØD2	Ød2	H	L1	L2	L3	※1L4	L5	Adjustment Pin Setting Position No.1	No.2	No.3	No.4		
EZH	03019CT-120	●	3.0	0.75"	13	6.0	18.0	120	16	8	21	30.5	13.5	9.5	5.5	-	Fig.2	EZBR...030... EZVBR035030-... EZGR...030-... EZTR...030-... ※3 HPB刃0303-...
	03020CT-120	○	3.0	20	13	6.0	19.0	120	16	8	21	30.5						
	03022CT-135	○	3.0	22	13	6.0	21.0	135	16	8	21	41.5						
	03025.0CT-135	○	3.0	25	13	6.0	24.0	135	16	8	21	30.5						
	03025.4CT-120	●	3.0	1.00"	13	6.0	24.4	120	16	8	21	30.5						
EZH	03519CT-120	●	3.5	0.75"	13	6.0	18.0	120	16	8	21	31.1	15.5	11.5	7.5	-	Fig.2	EZBR...035... EZTR...035-...
	03520CT-120	○	3.5	20	13	6.0	19.0	120	16	8	21	31.1						
	03522CT-135	○	3.5	22	13	6.0	21.0	135	16	8	21	41.5						
	03525.0CT-135	○	3.5	25	13	6.0	24.0	135	16	8	21	31.1						
	03525.4CT-120	●	3.5	1.00"	13	6.0	24.4	120	16	8	21	31.1						
EZH	04019CT-120	●	4.0	0.75"	13	6.0	18.0	120	16	8	22	32.7	20.5	16.5	12.5	8.5	Fig.3	EZBR...040... EZVBR045040-... EZGR...040-... EZFGR...040-... EZTR...040-... ※3 HP...04-...
	04020CT-120	○	4.0	20	13	6.0	19.0	120	16	8	22	32.7						
	04022CT-135	○	4.0	22	13	6.0	21.0	135	16	8	22	41.5						
	04025.0CT-135	○	4.0	25	13	6.0	24.0	135	16	8	22	32.7						
	04025.4CT-120	●	4.0	1.00"	13	6.0	24.4	120	16	8	22	32.7						
EZH	05019CT-120	●	5.0	0.75"	16	6.0	18.0	120	18	9	26	30.0	25.5	20.5	15.5	10.5	Fig.3	EZBR...050... EZVBR055050-... EZGR...050-... EZFGR...050-... EZTR...050-... ※3 HP...05-...
	05020CT-120	○	5.0	20	16	6.0	19.0	120	18	9	26	30.0						
	05022CT-135	○	5.0	22	16	6.0	21.0	135	18	9	26	44.0						
	05025.0CT-135	○	5.0	25	16	6.0	24.0	135	18	9	26	30.0						
	05025.4CT-120	●	5.0	1.00"	16	6.0	24.4	120	18	9	26	30.0						
EZH	06019CT-120	●	6.0	0.75"	16	7.4	18.0	120	18	9	28	30.0	30.5 (18.5)	25.5 (13.5)	20.5 (-)	15.5 (-)	Fig.3	EZBR...060... EZVBR065060-... EZGR...060-... EZTR...060-..._060X-...-070EZ ※3 HP...0606-...
	06020CT-120	●	6.0	20	16	7.4	19.0	120	18	9	28	30.0						
	06022CT-135	●	6.0	22	16	7.4	21.0	135	18	9	28	41.5						
	06025.0CT-135	○	6.0	25	16	7.4	24.0	135	18	9	28	30.0						
	06025.4CT-120	●	6.0	1.00"	16	7.4	24.4	120	18	9	28	30.0						
EZH	07019CT-120	●	7.0	0.75"	16	7.4	18.0	120	18	9	29	30.0	35.5	30.5	25.5	20.5	Fig.3	EZBR...070... EZGR...070-... EZFGR...070-... EZTR...070-... ※3 HP...07-...
	07020CT-120	○	7.0	20	16	7.4	19.0	120	18	9	29	30.0						
	07022CT-135	○	7.0	22	16	7.4	21.0	135	18	9	29	44.0						
	07025.0CT-135	○	7.0	25	16	7.4	24.0	135	18	9	29	30.0						
	07025.4CT-120	●	7.0	1.00"	16	7.4	24.4	120	18	9	29	30.0						

※1: L4 shows Ød1 length
※2: Dimension T shows overhang length of the EZB Bar when attached to sleeve. Dimensions in ( ) show overhand length of EZ Bar PLUS.
※3: HP type bars are not adjustable.
• Choose sleeves (Ød1) to match ØD dimension of bar.

EZ Bar Mounting Procedure ➡ F15

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)