
для заказа - kyocera@kyocera-tools.ru



## **A/S-SCLC-AE** Excellent Bar (Boring / Internal Facing)

(Max. Overhang Length **L/D = ~5.5**)



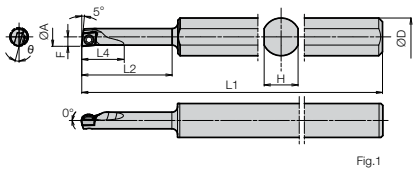



Fig.1

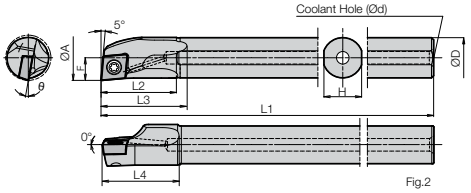



Fig.2


| Shank Dia. ØD | Coolant Hole Dia. Ød |
|---|---|
| Ø8mm | Ø2.5mm |
| Ø0.375" Ø10mm | Ø3.0mm |
| Ø0.500" Ø12mm | Ø4.0mm |
| Ø0.625" Ø16mm | Ø5.0mm |
| Ø0.750" Ø20mm | Ø5.0mm |
| Ø1.000" Ø25mm | Ø5.0mm |

• Right-hand shown

• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder

## **S-SCLC-A** Steel Bar (Boring / Internal Facing)

(Max. Overhang Length **L/D = ~4**)



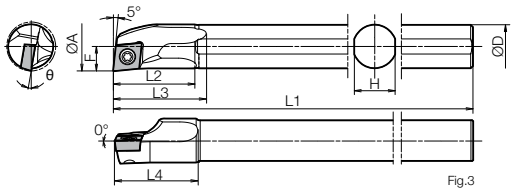




Fig.3

• Right-hand shown

• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder

## **C/E-SCLC-A** Carbide Shank Bar (Boring / Internal Facing)

(Max. Overhang Length **L/D = ~7**)



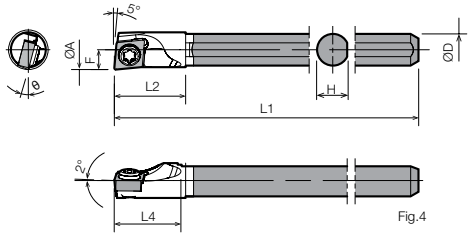



Fig.4

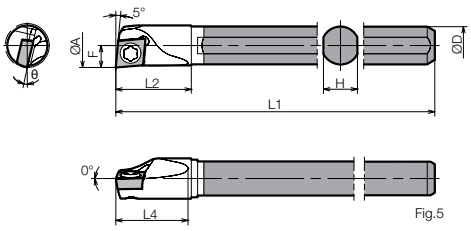



Fig.5

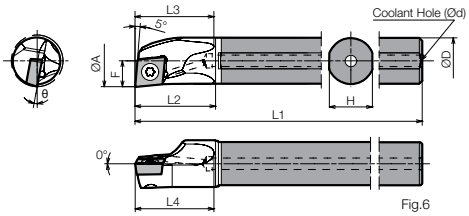



Fig.6

| Shank Dia. ØD | Coolant Hole Dia. Ød |
|---|---|
| Ø8mm | Ø3mm |
| Ø0.375" Ø10mm | Ø3mm |
| Ø0.500" Ø12mm | Ø4mm |
| Ø0.625" Ø16mm | Ø4mm |
| Ø20mm | Ø6mm |
| Ø25mm | Ø6mm |

• Right-hand shown

• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder



kyocera@kyocera-tools.ru
www.kyocera-tools.ru