


для заказа - kyocera@kyocera-tools.ru

A-SDZC-AE Excellent Bar (Back Boring)

(Max. Overhang Length **L/D = ~5.5**)



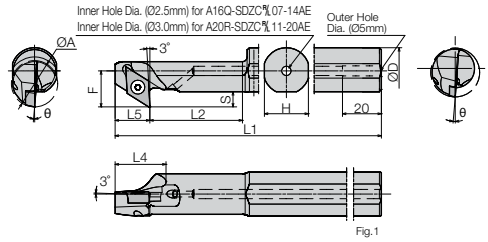

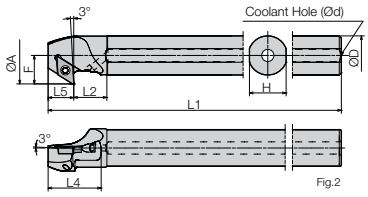


Shank Dia. ØD	Coolant Hole Dia. Ød
Ø10mm	Ø3mm
Ø12mm	Ø4mm
Ø16mm	Ø5mm
Ø20mm	Ø5mm
Ø25mm	Ø5mm


• Right-hand shown

• Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder

S-SDZC-A Steel Bar (Back Boring)

(Max. Overhang Length **L/D = ~4**)



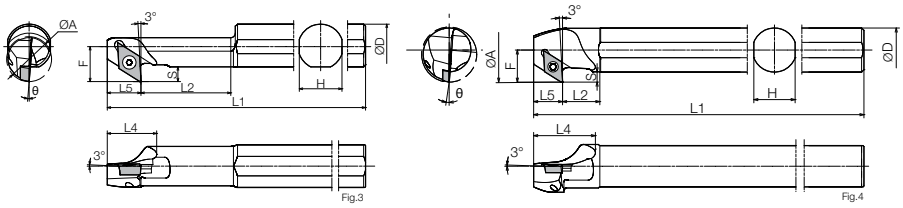



• Right-hand shown

• Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder

E-SDZC-A Carbide Shank Bar (Back Boring)

(Max. Overhang Length **L/D = ~7**)



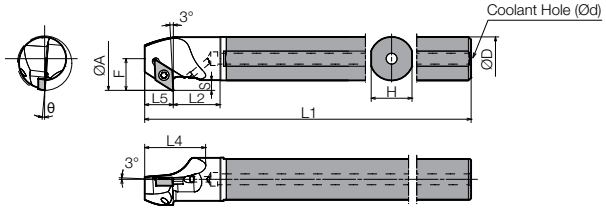

Shank Dia. ØD	Coolant Hole Dia. Ød
Ø10mm	Ø3mm
Ø12mm	Ø4mm
Ø16mm	Ø4mm
Ø20mm	Ø6mm

• Right-hand shown

• Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder

Toolholder Dimensions

	Part Number	Stock R	Stock L	Min. Bore Dia. ØA	Dimensions (mm) ØD	H	L1	L2	L4	L5	F	S	θ	Standard Corner-R(rε)	Coolant Hole	Drawing	Spare Parts: Clamp Screw	Spare Parts: Wrench
Excellent Bar	A10L-SDZC□07-14AE	○	○	14	10	9	140	14.0	16	9.5	8.7	3.3	5°	0.4	Yes	Fig.2	SB-2545TR	FT-8
	A16Q-SDZC□07-14AE	○	○	14	16	15	180	30.0	17	10.0	10.8	4.4	5°	0.4	Yes	Fig.1	SB-2545TR	FT-8
	A12M-SDZC□07-16AE	○	○	16	12	11	150	14.0	20	10.5	9.7	3.3	5°	0.4	Yes	Fig.2	SB-2560TR	FT-8
	A16Q-SDZC□07-20AE	○	○	20	16	15	180	14.0	22	10.5	11.7	3.3	5°					
	A20R-SDZC□11-20AE	○	○	20	20	19	200	40.0	24	15.0	15.6	6.1	5°	0.4	Yes	Fig.1	SB-4065TR	FT-15
	A16Q-SDZC□11-23AE	○	○	23	16	15	180	15.0	22	15.0	14.5	6.1	5°	0.4	Yes	Fig.2	SB-4065TR	FT-15
	A20R-SDZC□11-27AE	○	○	27	20	19	200	15.0	25	15.0	16.5	6.1	5°					
	A25S-SDZC□11-32AE	○	○	32	25	24	250	15.0	26	15.0	19.0	6.1	5°					
Steel	S10L-SDZC□07-14A	○	○	14	10	9	140	14.0	16	9.5	8.7	3.3	5°	0.4	No	Fig.4	SB-2545TR	FT-8
	S16Q-SDZC□07-14A	○	○	14	16	15	180	30.0	17	10.0	10.8	4.4	5°	0.4	No	Fig.3	SB-2545TR	FT-8
	S12M-SDZC□07-16A	○	○	16	12	11	150	14.0	20	10.5	9.7	3.3	5°	0.4	No	Fig.4	SB-2560TR	FT-8
	S16Q-SDZC□07-20A	○	○	20	16	15	180	14.0	22	10.5	11.7	3.3	5°					
	S20R-SDZC□11-20A	○	○	20	20	19	200	40.0	24	15.0	15.6	6.1	5°	0.4	No	Fig.3	SB-4065TR	FT-15
	S16Q-SDZC□11-23A	○	○	23	16	15	180	15.0	22	15.0	14.5	6.1	5°	0.4	No	Fig.4	SB-4065TR	FT-15
	S20R-SDZC□11-27A	○	○	27	20	19	200	15.0	25	15.0	16.5	6.1	5°					
	S25S-SDZC□11-32A	○	○	32	25	24	250	15.0	26	15.0	19.0	6.1	5°					
Carbide	E10N-SDZC□07-14A	○		14	10	9	160	10.5	16	9.5	8.7	3.3	5°	0.4	Yes	Fig.5	SB-2545TR	FT-8
	E12Q-SDZC□07-16A	●		16	12	11	180	12.5	20	10.5	9.7	3.3	5°	0.4	Yes	Fig.5	SB-2560TR	FT-8
	E16X-SDZC□07-20A	○		20	16	15	220	17.5	22	10.5	11.7	3.3	5°					
	E16X-SDZC□11-23A	○		23	16	15	220	13.0	22	15.0	14.5	6.1	5°	0.4	Yes	Fig.5	SB-4065TR	FT-15
	E20S-SDZC□11-27A	○		27	20	19	250	17.0	25	15.0	16.5	6.1	5°					

Applicable Inserts ➔ **F45**

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)