
для заказа - kyocera@kyocera-tools.ru

A/S-STLB(P)-AE Excellent Bar (Boring / Internal Facing)

(Max. Overhang Length **L/D = ~5.5**)



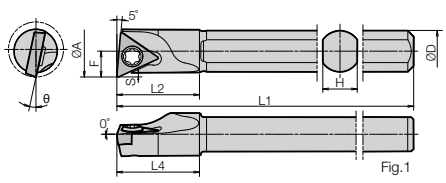


Fig.1

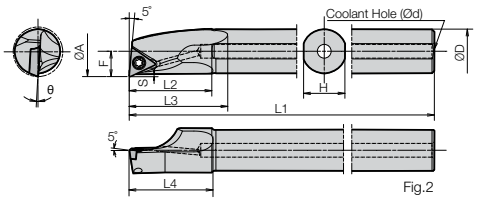


Fig.2


Shank Dia. ØD	Coolant Hole Dia. Ød
Ø0.312" Ø8mm	Ø2.5mm
Ø0.375" Ø10mm	Ø3.0mm
Ø0.500" Ø12mm	Ø4.0mm
Ø0.625" Ø16mm	Ø5.0mm
Ø0.750" Ø20mm	Ø5.0mm
Ø1.000" Ø25mm	Ø5.0mm

• Right-hand shown

• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder

S-STLB(P)-A Steel Bar (Boring / Internal Facing)

(Max. Overhang Length **L/D = ~4**)



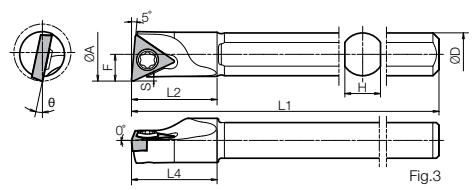


Fig.3

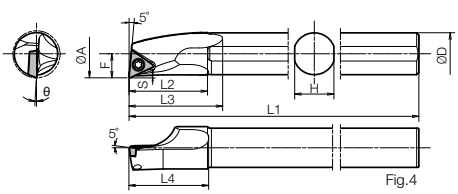



Fig.4

• Right-hand shown

• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder

E(C)-STLB(P)-A Carbide Shank Bar (Boring / Internal Facing)

(Max. Overhang Length **L/D = ~7**)



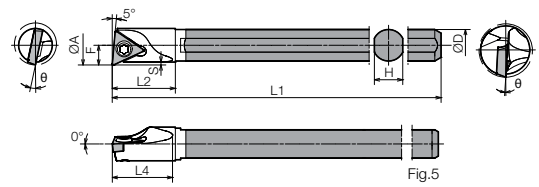


Fig.5

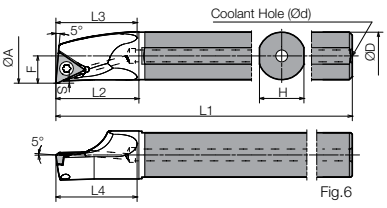


Fig.6

Shank Dia. ØD	Coolant Hole Dia. Ød
Ø8mm	Ø3mm
Ø10mm	Ø3mm
Ø12mm	Ø4mm
Ø16mm	Ø4mm
Ø20mm	Ø6mm
Ø25mm	Ø6mm

• Right-hand shown

• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder

kyocera@kyocera-tools.ru
www.kyocera-tools.ru