

для заказа - kyocera@kyocera-tools.ru


S-CCLN-A (Boring / Internal Facing)



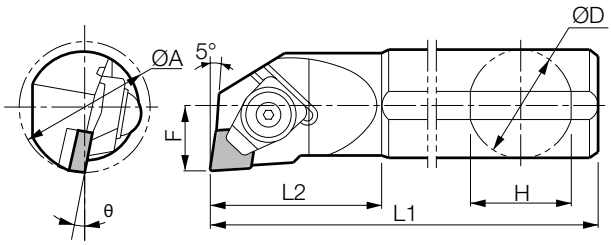

• Right-hand shown

Applicable Inserts


Hardened Materials / Cast Iron
C19
CBN (KBN900)

CNM32..


Toolholder Dimensions

Recommended Cutting Conditions **F103~F104**

Part Number	Previous Part Number	Stock		Unit	Min. Bore Dia.	Dimensions					θ	Standard Corner-R(rε)	Spare Parts			
		R	L		ØA	ØD	H	L1	L2	F			Clamp Set	Wrench	Shim	Shim Screw
																
S32S-CCLN□09-40A	CCLN□ 4032B-09A	○	○	mm	40	32	30	250	50	22	8°	0.8	CE-360S	LW-4	SP-420A	BH3X6

S-CTUN-A (Boring)



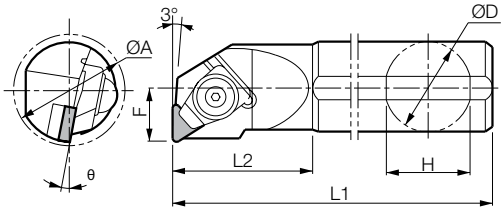

• Right-hand shown

Applicable Inserts

Hardened Materials / Cast Iron	Hardened Materials / Cast Iron
C19	B95
CBN (KBN900)	Ceramic
	
TNM22..	TNG22..

Toolholder Dimensions

Recommended Cutting Conditions **F103~F104**

Part Number	Previous Part Number	Stock		Unit	Min. Bore Dia.	Dimensions (mm)					θ	Standard Corner-R(rε)	Spare Parts			
		R	L		ØA	ØD	H	L1	L2	F			Clamp Set	Wrench	Shim	Shim Screw
																
S25X-CTUN□11-30A	CTUN□3025B-11A	○		mm	30	25	24	220	40	15	10°	0.8	CE-360S	LW-4	SP-210A	BH3X6

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)