

для заказа - kyocera@kyocera-tools.ru

SIGE-EH Excellent Bar (With Coolant Hole)

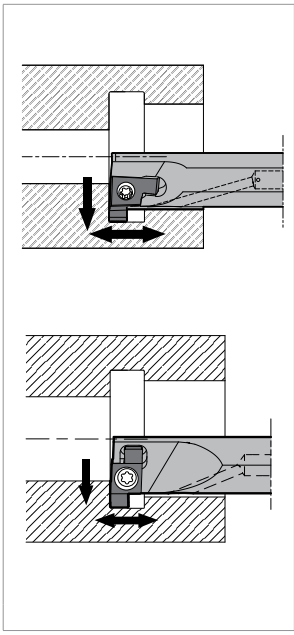

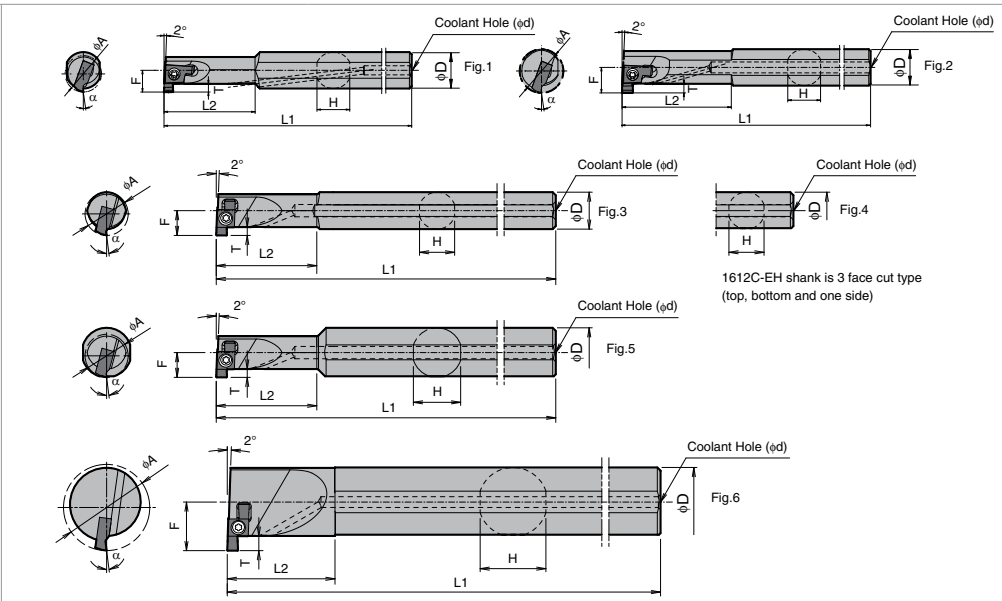

• Right-hand shown

Right-hand Insert for Right-hand Toolholder, Left-hand Insert for Left-hand Toolholder

Toolholder Dimensions

Part Number		Stock R	Stock L	Unit	Min. Bore Dia. ØA	Dimensions ØD	H	L1	L2	F	T	Ød	Drawing	Spare Parts: Clamp Screw	Spare Parts: Wrench FT	Spare Parts: Wrench DT	Applicable Inserts ➔ G52~G54
SIGE®	05EH	●	●	inch	0.313	0.315	0.283	3.940	0.787	0.177	0.059	0.158	Fig.1	SB-2045TRN	FT-6	-	GE®100-005A~GE®200-010A GER100-050AR~GER200-100AR
	06EH	●	●		0.394	0.394	0.354	4.920	0.984	0.232	0.087	0.158	Fig.1	SB-2255TR	-	DT-7	GE®100-005B~GE®300-020B GER100-050BR~GER200-100BR
	0809C-EH	●	●		0.551	0.500	0.460	5.900	1.300	0.315	0.098	0.158	Fig.2	SB-2570TR	FT-8	-	GE®100-005C~GE®350-020C GER150-010CM~GER350-020CM GER200-100CR~GER300-150CR
	0810C-EH	●	●		0.630	0.500	0.460	5.900	0.788	0.335	0.098	0.158	Fig.3				
	1213D-EH	●	●		0.790	0.750	0.710	7.09	1.575	0.477	0.177	0.196	Fig.5	SB-3080TR	FT-10	-	GE®100-005D~GE®400-020D GER150-010DM~GER400-020DM GER200-100DR~GER300-150DR
	1616E-EH	●	●		1.000	1.000	0.960	7.88	1.772	0.614	0.255	0.196	Fig.5	SB-4085TR	FT-15	-	GE®100-005E~GE®500-020E GER150-010EM~GER500-020EM
	2020E-EH	●	●		1.250	1.250	1.170	8.66	2.166	0.748	0.255	0.196					
	2025E-EH	●	●		1.575	1.250	1.170	9.84	1.772	0.906	0.255	0.196	Fig.6				
SIGE®	0808A-EH	○	○	mm	8	8	7.2	100	20	4.8	1.5	3	Fig.1	SB-2045TRN	FT-6	-	GE®100-005A~GE®200-010A GER100-050AR~GER200-100AR
	1010B-EH	○	○		10	10	9.0	125	25	6.2	2.2	3	Fig.1	SB-2255TR	-	DT-7	GE®100-005B~GE®300-020B GER100-050BR~GER200-100BR
	1210B-EH	○	○		12	10	9.0	125	30	7.0	2.2	3	Fig.2				
	1412C-EH	○	○		14	12	11.4	150	33	8.0	2.5	4	Fig.3	SB-2570TR	FT-8	-	GE®100-005C~GE®350-020C GER150-010CM~GER350-020CM GER200-100CR~GER300-150CR
	1612C-EH	○	○		16	12	11.4	150	20	8.5	2.5	4	Fig.4				
	1616C-EH	○	○		16	16	15.0	160	36	9.0	2.5	5	Fig.5				
	2020D-EH	○	○		20	20	19.0	180	40	12.1	4.5	5	Fig.5	SB-3080TR	FT-10	-	GE®100-005D~GE®400-020D GER150-010DM~GER400-020DM GER200-100DR~GER300-150DR
	2525E-EH	○	○		25	25	24.0	200	45	15.6	6.5	5	Fig.5	SB-4085TR	FT-15	-	GE®100-005E~GE®500-020E GER150-010EM~GER500-020EM
	3232E-EH	○	○		32	32	30.4	220	55	19.0	6.5	5					
	4032E-EH	○	○		40	32	30.4	250	45	23.0	6.5	5	Fig.6				


• Dimension T shows available grooving depth. Available Groove Depth : "B" Dimension of Insert.

Features

- Traditional top clamp has been replaced with a screw clamp only. This design creates a large chip pocket that provides excellent chip evacuation



- Cutting Edge is Protected in the Pocket

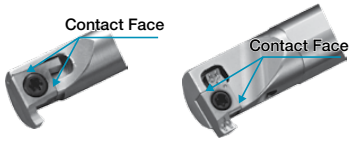

- 8mm Minimum Cutting Diameter with 2-Edge Design



- Cost effective chip control from a 3-D molded chipbreaker

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)