

для заказа - kyocera@kyocera-tools.ru




## GFVS-AA



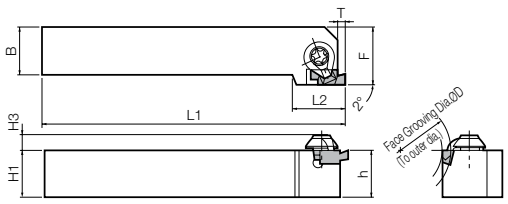



• Right-hand shown

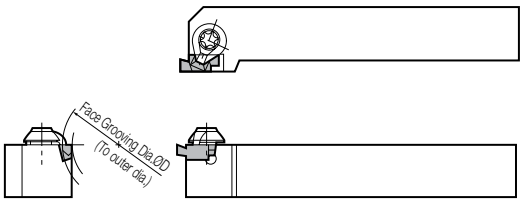



• Left-hand shown


• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

## GFVT-AA



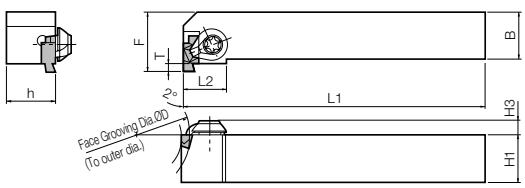


• Right-hand shown

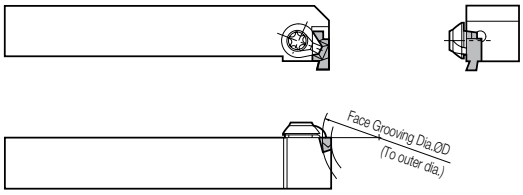


• Left-hand shown

• Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

### Toolholder Dimensions

| Part Number | | Stock | | Dimensions (mm) | | | | | | | | Face Grooving Dia. ØD | | Spare Parts | | Applicable Inserts ➔ G109 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | R | L | H1 | h | H3 | B | L1 | L2 | F | T | MIN | MAX | Clamp Set | Wrench | |
| GFVS□ | 2020K-08AA | ○ | ○ | 20 | 20 | 5.5 | 20 | 125 | 18 | 25 | 2.2 | 8 (0) | ∞ (∞) | CPS-5V | FT-15 | GVF□100-005AA ~ GVF□300-005AA |
| | 2525M-08AA | ○ | ○ | 25 | 25 | 5.5 | 25 | 150 | 18 | 32 | 2.2 | | | | | |
| GFVT□ | 2020K-08AA | ○ | ○ | 20 | 20 | 5.5 | 20 | 125 | 14 | 25 | 2.2 | 20 25 | ∞ (∞) | CPS-5V | FT-15 | GVF□100-005AA ~ GVF□300-005AA |
| | 2525M-08AA | ○ | ○ | 25 | 25 | 5.5 | 25 | 150 | 14 | 32 | 2.2 | | | | | |

Note 1. Dimension T shows available grooving depth.

2. The value ( ) of Face Grooving Dia. (ØD MAX.) is the maximum outer diameter value after the initial groove between MIN.~MAX. (It is possible to widen the groove to infinity ∞). The value ( ) of Face Grooving Dia. (ØD MIN.) is the minimum diameter of the boss which remains in the center when widening the groove width to a smaller value after the initial groove between MIN.~MAX.





kyocera@kyocera-tools.ru
www.kyocera-tools.ru

U.S. Stock Standard : ●
World Express (Shipping: 7-10 Business Days) : ○