
для заказа - kyocera@kyocera-tools.ru

KGD (Integral-Style)

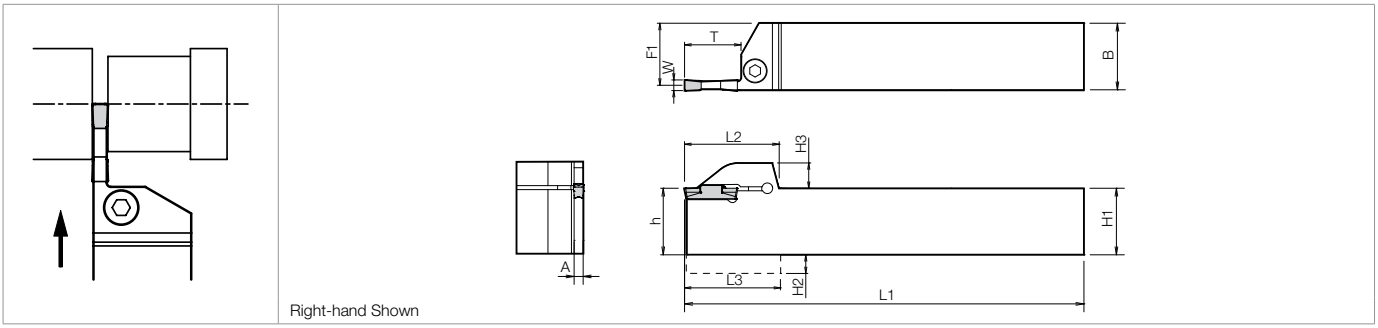

Right-hand Shown

Toolholder Dimensions (Inch Sizes)

Width (mm)	Max. D.O.C.	Part Number	Stock		Dimensions (in)										Insert Width W		Spare Parts	
																	Clamp Bolt	Wrench
			R	L	H1=h	H2	H3	B	L1	L2	L3	F1	A	T*	MIN	MAX		
2	0.669 (17mm)	KGDR/L 12-2T17	●	●	0.75	-	0.374	0.75	4.92	1.28	-	0.71	0.067	0.669 (17mm)	0.079	0.118	HH5X16	
		16-2T17	●	●	1.00	-	0.374	1.00	5.90	1.28	-	0.96	0.067		0.079	0.118	HH5X25	
3	0.394 (10mm)	KGDR/L 12-3T10	●	●	0.75	-	0.374	0.75	4.92	1.20	-	0.70	0.094	0.393 (10mm)	0.118	0.158	HH5X16	
		16-3T10	●	●	1.00	-	0.374	1.00	5.90	1.20	-	0.95	0.094		0.118	0.158	HH5X25	
	0.787 (20mm)	KGDR/L 12-3T20	●	●	0.75	-	0.374	0.75	4.92	1.35	-	0.70	0.094	0.787 (20mm)	0.118	0.158	HH5X16	
		16-3T20	●	●	1.00	-	0.374	1.00	5.90	1.39	-	0.95	0.094		0.118	0.158	HH5X25	
4	0.394 (10mm)	KGDR/L 12-4T10	●	●	0.75	-	0.374	0.75	4.92	1.20	-	0.68	0.133	0.393 (10mm)	0.158	0.197	HH5X16	
		16-4T10	●	●	1.00	-	0.374	1.00	5.90	1.20	-	0.93	0.133		0.158	0.197	HH5X25	
	0.787 (20mm)	KGDR/L 12-4T20	●	●	0.75	-	0.374	0.75	4.92	1.35	-	0.68	0.133	0.787 (20mm)	0.158	0.197	HH5X16	
		16-4T20	●	●	1.00	-	0.374	1.00	5.90	1.39	-	0.93	0.133		0.158	0.197	HH5X25	
	0.984 (25mm)	KGDR/L 16-4T25	●	●	1.00	-	0.374	1.00	5.90	1.59	-	0.93	0.133	0.990 (25mm)	0.158	0.197	HH5X25	
5	0.394 (10mm)	KGDR/L 12-5T10	●	●	0.75	-	0.374	0.75	4.92	1.20	-	0.66	0.173	0.393 (10mm	0.197	0.236	HH5X16	
		16-5T10	●	●	1.00	-	0.374	1.00	5.90	1.20	-	0.91	0.173		0.197	0.236	HH5X25	
	0.669 (17mm)	KGDR/L 12-5T17	●	●	0.75	-	0.374	0.75	4.92	1.47	-	0.66	0.173	0.669 (17mm)	0.197	0.236	HH5X16	
		16-5T17	●	●	1.00	-	0.374	1.00	5.90	1.47	-	0.91	0.173		0.197	0.236	HH5X25	
	0.984 (25mm)	KGDR/L 16-5T25	●	●	1.00	-	0.374	1.00	5.90	1.59	-	0.91	0.173	0.990 (25mm)	0.197	0.236	HH5X25	
6	0.591 (15mm)	KGDR/L 16-6T15	●	●	1.00	-	0.374	1.00	5.90	1.28	-	0.89	0.208	0.590 (15mm)	0.236	0.236	HH5X25	
	1.181 (30mm)	KGDR/L 16-6T30	●	●	1.00	-	0.374	1.00	5.90	1.79	-	0.89	0.208	1.181 (30mm)	0.236	0.236	HH5X25	
8	0.984 (25mm)	KGDR/L 16-8T25	●	●	1.00	0.26	0.374	1.00	5.90	1.65	1.69	0.89	0.236	0.990 (25mm)	0.315	0.315	HH6X25	LW-5

LW-4

* T Dimension shows the available grooving depth (If the T Dimension is 0.787" or more, the maximum depth of groove made by the 2-edge insert will be 0.709").
• Recommended tightening torque of screw : 6.5N·m (Groove width 2~6mm)

Recommended Cutting Conditions ➡ H20~H21

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

U.S. Stock Standard : ●
World Express (Shipping: 7-10 Business Days) : ○