
для заказа - kyocera@kyocera-tools.ru

KGD (Integral-Style)

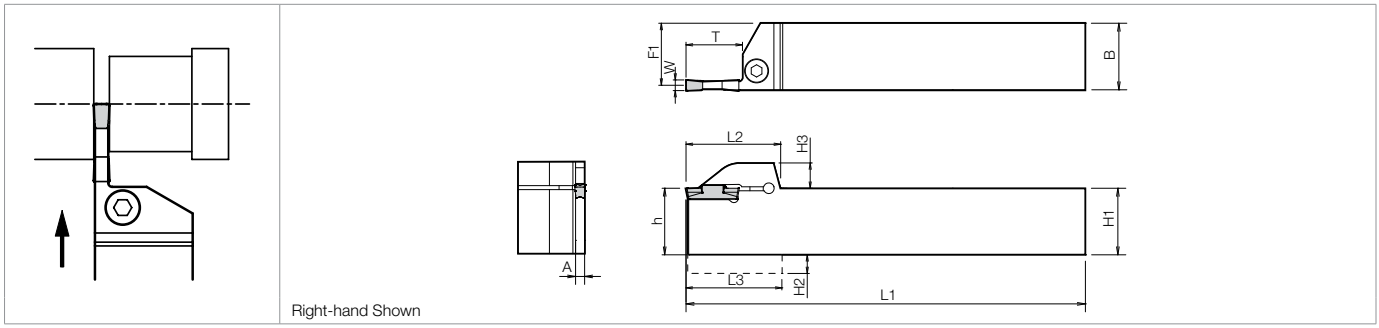

Right-hand Shown

Toolholder Dimensions (Metric Sizes)

Width (mm)	Max. D.O.C.	Part Number	Stock R	Stock L	H1=h	H2	H3	B	L1	L2	L3	F1	A	T*	Insert Width W MIN	Insert Width W MAX	Spare Parts: Clamp Bolt	Spare Parts: Wrench
2	6	KGD 1616H-2T06	○	○	16	4.0	9.5	16	100	27.7	28.0	15.2	1.7	6	2.0	3.0	HH5X16	LW-4
		2020K-2T06	○	○	20	-	9.5	20	125	28.0	-	19.2	1.7	6			HH5X16	
		2525M-2T06	●	○	25	-	9.5	25	150	28.0		24.2	1.7	6			HH5X25	
	10	KGD 1616H-2T10	○	○	16	4.0	9.5	16	100	30.2	30.5	15.2	1.7	10	2.0	3.0	HH5X16	
		2020K-2T10	○	○	20	-	9.5	20	125	30.5	-	19.2	1.7	10			HH5X16	
		2525M-2T10	○	○	25	-	9.5	25	150	30.5	-	24.2	1.7	10			HH5X25	
	17	KGD 1616H-2T17	○	●	16	4.0	9.5	16	100	31.2	31.5	15.2	1.7	17	2.0	3.0	HH5X16	
		2012K-2T17	○	○	20	-	9.5	12	125	32.5	-	11.2	1.7	17			HH5X16	
		2020K-2T17	○	○	20	-	9.5	20	125	32.5	-	19.2	1.7	17			HH5X16	
		2525M-2T17	○	○	25	-	9.5	25	150	32.5	-	24.2	1.7	17			HH5X25	
2.4	17	KGD 2012K-2.4T17	○	○	20	-	9.5	12	125	32.5	-	11.0	2.0	17	2.4	3.0	HH5X16	
		2020K-2.4T17	○	○	20	-	9.5	20	125	32.5	-	19.0	2.0	17			HH5X16	
3	6	KGD 1616H-3T06	○	○	16	4.0	9.5	16	100	27.7	28.0	14.8	2.4	6	3.0	4.0	HH5X16	
		2020K-3T06	○	○	20	-	9.5	20	125	28.0	-	18.8	2.4	6			HH5X16	
		2525M-3T06	○	○	25	-	9.5	25	150	28.0	-	23.8	2.4	6			HH5X25	
	10	KGD 1616H-3T10	○	○	16	4.0	9.5	16	100	30.2	30.5	14.8	2.4	10	3.0	4.0	HH5X16	
		2020K-3T10	○	○	20	-	9.5	20	125	30.5	-	18.8	2.4	10			HH5X16	
		2525M-3T10	○	○	25	-	9.5	25	150	30.5	-	23.8	2.4	10			HH5X25	
	20	KGD 1616H-3T20	○	○	16	4.0	9.5	16	100	34.2	34.5	14.8	2.4	20	3.0	4.0	HH5X16	
		2012K-3T20	○	○	20	-	9.5	12	125	34.5	-	10.8	2.4	20			HH5X16	
		2020K-3T20	○	○	20	-	9.5	20	125	34.5	-	18.8	2.4	20			HH5X16	
		2525M-3T20	○	○	25	-	9.5	25	150	35.5	-	23.8	2.4	20			HH5X25	
4	10	KGD 2020K-4T10	○	○	20	-	9.5	20	125	30.5	-	18.3	3.4	10	4.0	5.0	HH5X16	
		2525M-4T10	○	○	25	-	9.5	25	150	30.5	-	23.3	3.4	10			HH5X25	
	20	KGD 2020K-4T20	○	○	20	-	9.5	20	125	34.5	-	18.3	3.4	20	4.0	5.0	HH5X16	
		2525M-4T20	○	○	25	-	9.5	25	150	35.5	-	23.3	3.4	20			HH5X25	
	25	KGD 2525M-4T25	○	○	25	-	9.5	25	150	40.5	-	23.3	3.4	25	4.0	5.0	HH5X25	

* T Dimension shows the available grooving depth (If the T Dimension is 20mm or more, the maximum depth of groove made by the 2-edge insert will be 18mm).
• Recommended tightening torque of screw : 6.5N·m (Groove width 2~5mm)

Recommended Cutting Conditions ➡ **H20~H21**

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)

kyocera@kyocera-tools.ru
www.kyocera-tools.ru