

для заказа - kyocera@kyocera-tools.ru

A-KKC (Cera-Notch Toolholders)



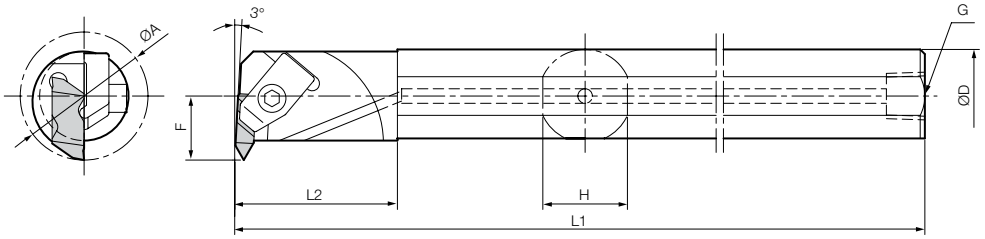

• Right-hand shown

• Right-hand Insert for Left-hand Toolholder, Right-hand Insert for Left-hand Toolholder

Toolholder Dimensions

Part Number	Stock R	Stock L	Unit	Min. Bore Dia. ØA	Dimensions ØD	Dimensions L1	Dimensions F	Dimensions G	Spare Parts: Clamp	Spare Parts: Clamp Bolt	Spare Parts: Wrench
A10M- KKC□-2	●		inch	1.000	0.625	6.00	0.500	1/8-27 NPT	CKC-2L	SKC-2	(7/64 Hex)
A10S- KKC□-2	●					10.00					
A12R- KKC□-2	●			1.125	0.750	8.00	0.562				
A12S- KKC□-2	●					10.00					
A16T- KKC□-2	●	●		1.375	1.000	12.00	0.688				
A16X- KKC□-3	●					9.00					
A16T- KKC□-3	●	●				12.00					
A20U- KKC□-3	●	●		1.750	1.250	14.00	0.875	1/4-18 NPT	CKC-3□	SKC-3	(LW-156)
A24U- KKC□-3	●	●		2.000	1.500		1.000				
A28U- KKC□-3	●			2.250	1.750		1.125				
A32V- KKC□-3	●	●		2.500	2.000	16.00	1.250				

Applicable Inserts

Part Number	Applicable Inserts	Ref. Page for Inserts
A...KKC□-2	KCT-2□, KCTK-2□, KCTP-2□	See Below
A...KKC□-3	KCT-3□, KCTK-3□, KCTP-3□	

Cera-Notch External Threading Inserts

KCT / KCTP / KCTK

Shape (Right-handed Insert Shown)		Part Number	Applicable Thread	Pitch TPI	Dimensions (in) A	T	R	E	S	L	Angle (°) θ	Insert Grade: Cermet TC60	MEGA COAT CVD PR1215	Carbide PR660	Ref. Page for Toolholder
Partial Profile		KCT 2□	M UN	External 8-36 Internal 7-20	0.219	0.150	0.004	0.266	0.075	0.350	60°	●	●	●	➡ J16 ➡ J17
		KCT 3□	M UN	External 6-20 Internal 5-12	0.344	0.195	0.007	0.400	0.098	0.634	60°	●	●	●	
		KCTP 2□	M UN	External 8-36 Internal 7-20	0.219	0.150	0.004	0.266	0.075	0.350	60°	●	●	●	
		KCTP 3□	M UN	External 6-20 Internal 5-12	0.344	0.195	0.007	0.400	0.098	0.634	60°	●	●	●	
		KCTK 2□	M UN	External 14-44 Internal 12-24	0.219	0.150	0.003	0.268	0.110	0.350	60°	●	●	●	
		KCTK 3□	M UN	External 10-44 Internal 9-24	0.344	0.195	0.003	0.402	0.141	0.634	55°	●	●	●	

Cera-Notch Conversion Table ➡ R21

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)