

3.00mm SHANK

4 FLUTE MICRO REAMERS


2.00mm - 2.19mm DIAMETER

Mirror Surface Finishes

Sub Micron Grain Carbide

Left Hand Spiral, Right Hand Cutting

For Reaming Through Holes

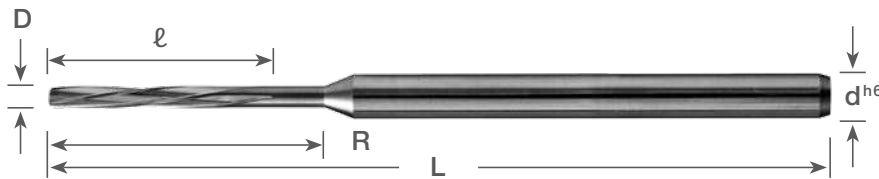

STANDARD Length (Metric Sizes)

Symbol Descriptions [Page 7](#)

Dimensions (mm)					Uncoated	
D ^{+0.003mm} _{-0.000mm}	d ^{h6}	ℓ	L	R	Part Number	Stock
2.00	3	11	50	20.50	MR34-0787.438	●
2.01	3	11	50	20.50	MR34-0791.438	●
2.02	3	11	50	20.50	MR34-0795.438	●
2.03	3	11	50	20.50	MR34-0799.438	●
2.04	3	11	50	20.50	MR34-0803.438	●
2.05	3	11	50	20.50	MR34-0807.438	●
2.06	3	11	50	20.50	MR34-0811.438	●
2.07	3	11	50	20.50	MR34-0815.438	●
2.08	3	11	50	20.50	MR34-0819.438	●
2.09	3	11	50	20.50	MR34-0823.438	●
2.10	3	11	50	20.50	MR34-0827.438	●
2.11	3	11	50	20.50	MR34-0830.438	●
2.12	3	11	50	20.50	MR34-0835.438	●
2.13	3	11	50	20.50	MR34-0838.438	●
2.14	3	11	50	20.50	MR34-0843.438	●
2.15	3	11	50	20.50	MR34-0846.438	●
2.16	3	11	50	20.50	MR34-0850.438	●
2.17	3	11	50	20.50	MR34-0854.438	●
2.18	3	11	50	20.50	MR34-0858.438	●
2.19	3	11	50	20.50	MR34-0862.438	●

DRILLS

END MILLS

ROUTERS

THREAD MILLS & TAPS

ENGRAVERS

BORING BARS

REAMERS

SAWS

TECHNICAL

INDEX

SERIES MR34 WORKPIECE MATERIAL

Coating	P Steel ~30HRC	P Steel 30-40HRC	H Hardened Steel ~55HRC	H Hardened Steel ~68HRC	M Stainless Steel	K Cast Iron	N Aluminum	N Graphite	N Copper Alloy	N CFRP	N Plastic	N Thermoset Plastic	N High Density Plastic	S Nickel / Cobalt	S Titanium Alloy
Uncoated	★	★	★	★	★	☆	☆	☆	☆	☆	☆	☆	☆	★	★

★ : Priority ☆ : Applicable Materials

Symbol Descriptions [Page 7](#)