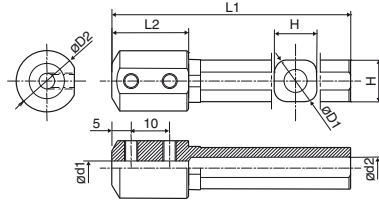
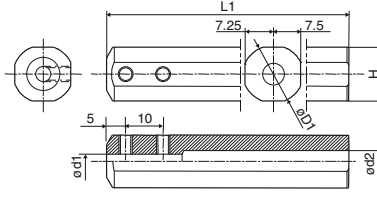
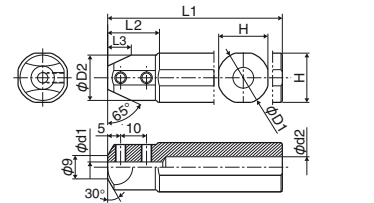


● Applicable Sleeve

																				
(2 Edges Tip-Bar installation side) Fig.1		(2 Edges Tip-Bar installation side) Fig.2		(2 Edges Tip-Bar installation side) Fig.3																
Description	Std.	Dimension (mm)								Drawing	Spare Parts		Applicable Machine Manufacturer	Ref. Page for 2 Edges Tip-Bar (Ref. Page for Other Application 2 Edges Tip-Bar)						
		* ød1	øD1	øD2	ød2	H	L1	L2	L3											
PSH 0212-80	●	2	12	16	6	11	80	20	-	Fig.1	HS3×4P	LW-1.5	(General use)	Boring (HPB Type) ⇒ F18						
0312-80	●	3									HS4×4P	LW-2								
0412-80	●	4									HS4×4P	LW-2								
0512-80	●	5			8						15	100			-	-	Fig.2	HS3×4P	LW-1.5	
0612-80	●	6																HS4×4P	LW-2	
0712-80	●	7																HS4×4P	LW-2	
PSH 0216-100	●	2	16	-	6	15	100	-	-	Fig.2								HS3×4P	LW-1.5	
0316-100	●	3																8	HS4×4P	LW-2
0416-100	●	4																		
0516-100	●	5																		
0616-100	●	6																		
0716-100	●	7																		
PSH 0220-120	●	2	20	17.5	6	19	120	20	11	Fig.3	HS3×4P	LW-1.5	Amada Wasino Eguro Citizen Machinery Precision Tsugami Miyano (General use)	Internal Back Boring (HPBT Type) ⇒ F18						
0320-120	●	3									8	HS4×4P			LW-2					
0420-120	●	4																		
0520-120	●	5																		
0620-120	●	6			7.5															
0720-120	●	7																		
PSH 0225.0-135	●	2	25	18		6	24	135	23	11.5	Fig.3		HS3×4P	LW-1.5		Amada Wasino Eguro Precision Tsugami Miyano (General use)	Internal Grooving (HPG Type) ⇒ G30			
0325.0-135	●	3			8							HS4×4P	LW-2							
0425.0-135	●	4																		
0525.0-135	●	5																		
0625.0-135	●	6			8															
0725.0-135	●	7																		
PSH 0219-120	●	2	19.05	17.5		6	18	120	20	11	Fig.3			HS3×4P	LW-1.5	Citizen Machinery	Internal Face Grooving (HPFG Type) ⇒ G53			
0319-120	●	3			8							HS4×4P	LW-2							
0419-120	●	4																		
0519-120	●	5																		
0619-120	●	6			7.5															
0719-120	●	7																		
PSH 0225-120	●	2	25.4	18		6	24.4	120	23	11.5	Fig.3			HS3×4P	LW-1.5	Citizen Machinery	Internal Threading (HPT Type) ⇒ J24			
0325-120	●	3			8							HS4×4P	LW-2							
0425-120	●	4																		
0525-120	●	5																		
0625-120	●	6			8															
0725-120	●	7																		
PSH 0222-135	●	2	22	18		6	21	135	22	11.5	Fig.3			HS3×4P	LW-1.5	Star Micronics Nomura VTC	Internal Threading (HPT Type) ⇒ J24			
0322-135	●	3			8							HS4×4P	LW-2							
0422-135	●	4																		
0522-135	●	5																		
0622-135	●	6			8															
0722-135	●	7																		
PSH 0223-120	●	2	23	18		6	22	120	22	11.5	Fig.3			HS3×4P	LW-1.5	Nomura VTC	Internal Threading (HPT Type) ⇒ J24			
0323-120	●	3			8							HS4×4P	LW-2							
0423-120	●	4																		
0523-120	●	5																		
0623-120	●	6			8															
0723-120	●	7																		

*: Length of ød1...20 mm (PH02, PH03, PH04 type)
...25 mm (PH05, PH06, PH07 type)

● : Std. Item ○ : Check Availability R : Std. Item (R-hand Only) L : Std. Item (L-hand Only)

- Choose sleeves (ød1) to meet with øD dimension of 2 Edges Tip-Bar.
- Machine manufactures in random order.

