


Dynamic Bar [DC ☐ ☐ Insert]


A-SDQC-AE Excellent Bar (Copying)

Max. Overhang Length L/D≈5.5

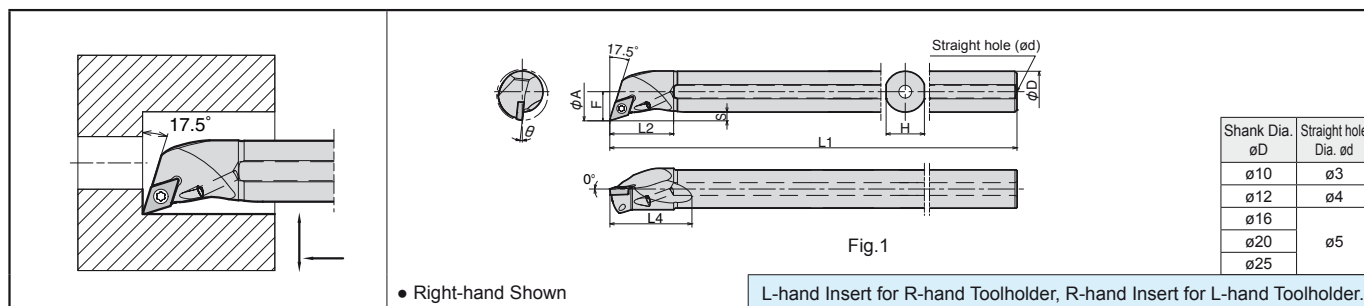


S-SDQC-A Steel Bar (Copying)

Max. Overhang Length L/D≈4

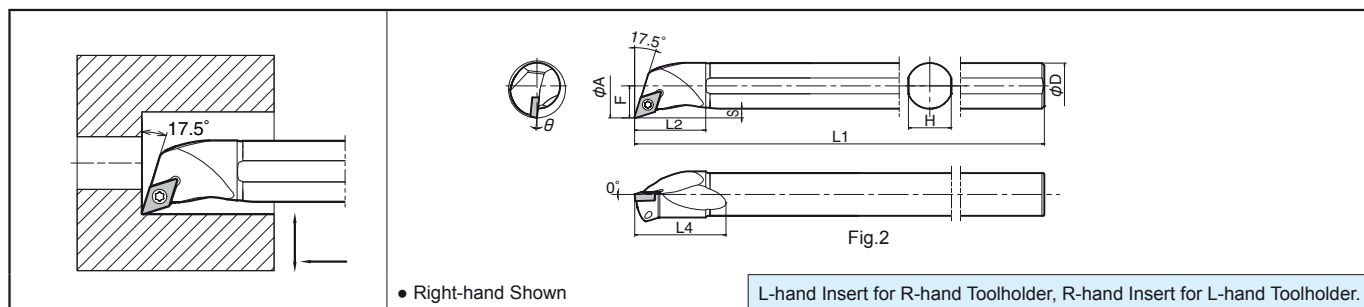

E-SDQC-A Carbide Shank Bar (Copying)

Max. Overhang Length L/D≈7

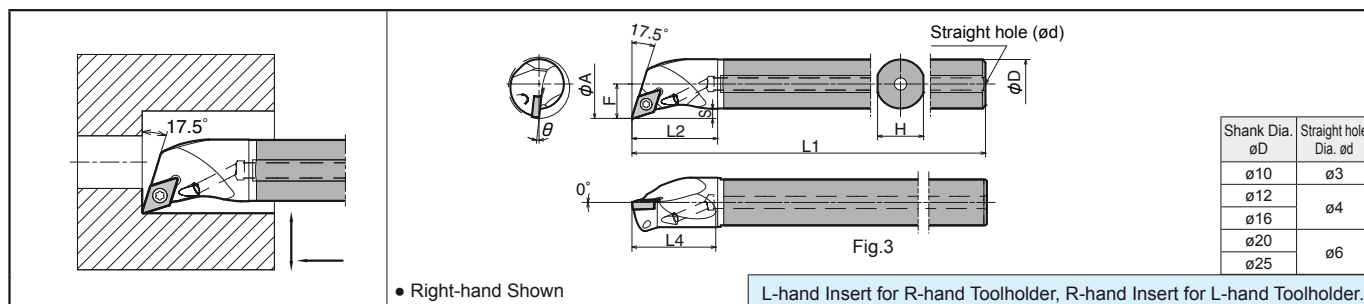

Toolholder Dimensions

Description				Std.		Min. Cutting Dia.	Dimension (mm)								θ	Standard Corner-R (R)	Coolant Hole	Drawing	Spare Parts		
				R	L		øA	øD	H	L1	L2	L3	L4	F					S		
Excellent Bar	A10L -SDQC ^{R/L} 07-13AE	●	●	13	10	9	140	19		21	7.5	2.1	10°	0.4	Yes	Fig.1		SB-2560TR	FT-8		
	A12M-SDQC ^{R/L} 07-16AE	●	●	16	12	11	150	22		25	9.25	2.6	8°								
	A16Q-SDQC ^{R/L} 07-20AE	●	●	20	16	15	180	25	-	32	11.3	2.6	6°								
	A20R-SDQC ^{R/L} 11-25AE	●	●	25	20	19	200	31		37	14.4	3.7	5°								
	A25S-SDQC ^{R/L} 11-30AE	●	●	30	25	24	250	38		45	16.9	3.7	4°								
Steel	S10L-SDQC ^{R/L} 07-13A	●	●	13	10	9	140	19		21	7.5	2.1	10°	0.4	No	Fig.2		SB-2560TR	FT-8		
	S12M-SDQC ^{R/L} 07-16A	●	●	16	12	11	150	22		25	9.25	2.6	8°								
	S16Q-SDQC ^{R/L} 07-20A	●	●	20	16	15	180	25	-	32	11.3	2.6	6°								
	S20R-SDQC ^{R/L} 11-25A	●	●	25	20	19	200	31		37	14.4	3.7	5°								
	S25S-SDQC ^{R/L} 11-30A	●	●	30	25	24	250	38		45	16.9	3.7	4°								
Carbide	E10N-SDQC ^{R/L} 07-13A	●	●	13	10	9	160	20	-	19	7.5	2.1	10°	0.4	Yes	Fig.3		SB-2560TR	FT-8		
	E10N-SDQC ^{R/L} 07-13A-2 / 3	●					105														
	E12Q-SDQC ^{R/L} 07-16A	●	●	16	12	11	180	23	-	22	9.25	2.6	8°								
	E12Q-SDQC ^{R/L} 07-16A-2 / 3	●					120														
	E16X-SDQC ^{R/L} 07-20A	●	●	20	16	15	220	28	-	27	11.3	2.6	6°								
	E16X-SDQC ^{R/L} 07-20A-2 / 3	●					145														
	E20S-SDQC ^{R/L} 11-25A	●	●	25	20	19	250	32	-	31	14.4	3.7	5°								
	E20S-SDQC ^{R/L} 11-25A-2 / 3	●					165														
	E25T-SDQC ^{R/L} 11-30A	●	●	30	25	24	300	38	-	37	16.9	3.7	4°								
	E25T-SDQC ^{R/L} 11-30A-2 / 3	●					200														

● : Std. Item ○ : Check Availability R : Std. Item (R-hand Only) L : Std. Item (L-hand Only)