
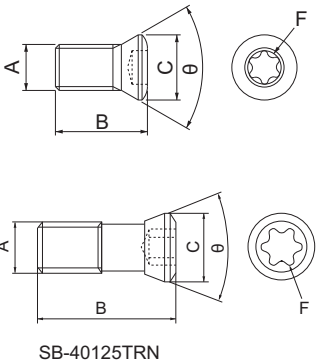









Shape	Description	Dimension (mm)						Angle (°)		Remarks	
		A	B	C	D	E	F	α	θ		
 SB-40125TRN	SB	-4050TRN	M4X0.5	4.6	5.1	-	-	T10	-	57°	○○ IP shows Torx Plus
		-4060TR	M4X0.7	5.9	5.5			T15		60°	
		-4065TR		6.7							
		-4070TRG		7.0							
		-4070TRN		6.9	5.4			T10		60°	
		-4070TRS		6.7	5.5						
		-4082TPR		8.2	5.5			15IP		50°	
		-4085TR		8.5	5.5						
		-40125TRN		12.5	5.2			T15		60°	
		-40140TR		14.0	5.5					60°	
	SB	-45130TR	M4.5X0.75	13.0	6.6	-	-	20IP	-	55°	
	SB	-5085TR	M5X0.8	8.5	6.8	-	-	T20	-	50°	
-50120TRS		12.0		7.2	15IP			60°			
-50137K		13.7		9.7	T20			70°			
SB	-60120TR	M6X1.0	12.0	8.5			T25	-	60°		
	SB	-4070TRW	M4X0.7	6.7	5.5	-	-	T8	-	60°	R...shows Right-hand Thread
		-4590TRWN	M4.5X0.75	9.3	5.6			T10		57°	
	SC	-30067	M3X0.35	6.7	4.4	-	-	T8	-	60°	
		-35085	M3.5X0.35	8.5	5.7			T10			
		-40100	M4X0.5	10.0	6.0			T15			
		-50130	M5X0.5	13.0	6.6			T20		40°	
		-60160	M6X0.75	16.0	8.0			T25			
		-60210		21.0	9.6			T30			
	SE	-40120TR	M4X0.7	12.0	5.1	-	-	T15	-	60°	
		-50125TR	M5X0.8	12.5	6.4			T20			
	SH	-50150TR	M5X0.8	15.1	7.4	3.2	-	T20	-	-	
	SP	3X4	M3X0.5	4.0	4.0	-	-	-	-	90°	Below flat head screw additionally processed item
		3X6		6.0	6.0						Cross recessed flat head screw equivalent to JIS B-1111
		3X8		8.0							
		3X10		10.0							
	SP	4X9	M4X0.7	9.0	5.6	-	2	-	-	90°	
 SP8X35	SP	8X35	M8X1.25	35	11	4.4	5	-	-	90°	
	SPW	-6045	M6X0.75	9.0	7.5	M4.5X0.75	4.5	-	-	-	A shows External, D shows Internal External and Internal threads are both Right-hand threads
	SS	-4N	M5.5X0.5	8.5	6.6	M4X0.7	4	-	-	-	

• For tightening torque of Torx screw, see P6.

P



Spare Parts