для заказа - kyocera@kyocera-tools.ru

EZH-ST (Sleeve)

NOT Adjustable

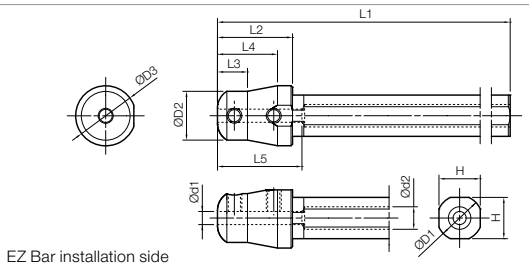


Fig.1

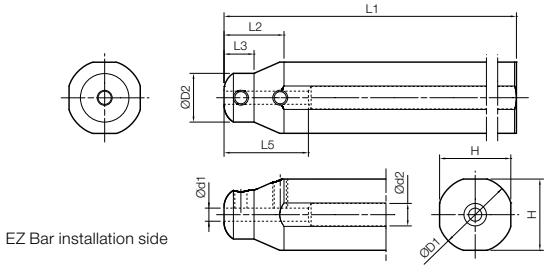


Fig.2

Part Number		Stock	Dimensions (mm)											Drawing	Applicable EZ Bar F16~F18 F21, F36 G48, G51, G76, G79 J28, J32
			Ød1	ØD1	ØD2	ØD3	Ød2	H	L1	L2	L3	L4	※L5		
EZH	01712ST-80	○	1.7	12	13	16	6	11.0	80	20	8	16	16	Fig.1	EZBR…017…
	01716ST-100	○	1.7	16	13	-	6	15.0	100	16	8	-	16	Fig.2	
	01719ST-120	○	1.7	0.75"	13	-	6	18.0	120	16	8	-	16		
	01720ST-120	○	1.7	20	13	-	6	19.0	120	16	8	-	16		
	01722ST-135	●	1.7	22	13	-	6	21.0	135	16	8	-	16		
	01725.0ST-135	○	1.7	25	13	-	6	24.0	135	16	8	-	16		
	01725.4ST-120	○	1.7	1.00"	13	-	6	24.4	120	16	8	-	16		
EZH	02512ST-80	○	2.5	12	13	16	6	11.0	80	20	8	16	20	Fig.1	EZBR…025… EZTR…025-…
	02516ST-100	○	2.5	16	13	-	6	15.0	100	16	8	-	20	Fig.2	
	02519ST-120	○	2.5	0.75"	13	-	6	18.0	120	16	8	-	20		
	02520ST-120	○	2.5	20	13	-	6	19.0	120	16	8	-	20		
	02522ST-135	○	2.5	22	13	-	6	21.0	135	16	8	-	20		
	02525.0ST-135	○	2.5	25	13	-	6	24.0	135	16	8	-	20		
	02525.4ST-120	○	2.5	1.00"	13	-	6	24.4	120	16	8	-	20		
EZH	03512ST-80	○	3.5	12	13	16	6	11.0	80	20	8	16	22	Fig.1	EZBR…035… EZTR…035-…
	03516ST-100	○	3.5	16	13	-	6	15.0	100	16	8	-	22	Fig.2	
	03519ST-120	○	3.5	0.75"	13	-	6	18.0	120	16	8	-	22		
	03520ST-120	○	3.5	20	13	-	6	19.0	120	16	8	-	22		
	03522ST-135	○	3.5	22	13	-	6	21.0	135	16	8	-	22		
	03525.0ST-135	○	3.5	25	13	-	6	24.0	135	16	8	-	22		
	03525.4ST-120	○	3.5	1.00"	13	-	6	24.4	120	16	8	-	22		

※:L5 shows Ød1 length
- Choose sleeves (Ød1) to match ØD dimension of bar.
- Adjustment pin cannot be installed in EZH-ST sleeves. To adjust overhang of EZB insert, please use EZH-CT or EZH-HP sleeves.

※:L5 shows Ød1 length
- Choose sleeves (Ød1) to meet with ØD dimension of bar.
- Adjustment pin cannot be installed in EZH-ST sleeves. To adjust overhang of EZB insert, please use EZH-CT or EZH-HP sleeves.

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

U.S. Stock Standard : ●
World Express (Shipping: 7-10 Business Days) : ○