




Holeshot Drill DR

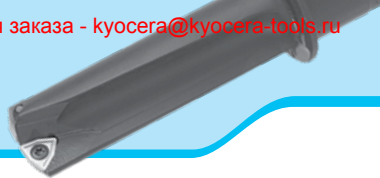

● Toolholder Dimensions

Description	Stock	No. of Insert	Dimension (inch)						Spare Parts		Applicable Inserts ● Page 53							
			ØD	Ød1	MDD	L1	L2	L3	L4	Clamp Screw		Wrench						
																		
DR -1062-X3N	●	2	1.062 (27mm)	1.000	3.18	6.37	4.09	2.28	.155	SCR03	T9	WCMX 050308-M1(A)						
-1094	●		1.094	1.000	2.13	5.16	2.88						.159					
-1094-X3N	●		1.094	1.000	3.28	6.47	4.19						.159					
-1102	●		1.102 (28mm)	1.000	2.13	5.16	2.88						.160					
-1102-X3N	●		1.102 (28mm)	1.000	3.31	6.53	4.25						.160					
-1125	●		1.125	1.000	2.13	5.16	2.88						.163					
-1125-X3N	●		1.125	1.000	3.37	6.56	4.28						.163					
-1142	●		1.142 (29mm)	1.000	2.13	5.16	2.88						.165					
-1142-X3N	●		1.142 (29mm)	1.000	3.43	6.66	4.38						.165					
-1156	●		1.156	1.000	2.13	5.16	2.88						.167					
-1156-X3N	●		1.156	1.000	3.47	6.67	4.39						.167					
DR -1181	●		2	1.181 (30mm)	1.000	2.13	5.16						2.88	2.28	.169	SCR30	T10	WCMX 06T308-M1(A)
-1181-X3N	●	1.181 (30mm)		1.000	3.54	6.78	4.50	.169										
-1187	●	1.187		1.000	2.13	5.16	2.88	.169										
-1187-X3N	●	1.187		1.250	3.56	6.76	4.48	.169										
-1219	●	1.219		1.000	2.50	5.53	3.25	.173										
-1219-X3N	●	1.219		1.250	3.66	6.86	4.58	.173										
-1250	●	1.250		1.000	2.50	5.53	3.25	.177										
-1250-X3N	●	1.250		1.250	3.75	6.96	4.68	.177										
-1260	●	1.260 (32mm)		1.000	2.50	5.53	3.25	.179										
-1260-X3N	●	1.260 (32mm)		1.250	3.78	7.03	4.75	.179										
DR -1281	●	2		1.281	1.000	2.50	5.53	3.25	2.28	.181	SCR30	T10	WCMX 06T308-M1(A)					
-1281-X3N	●			1.281	1.250	3.84	7.05	4.77										
-1299	●		1.299 (33mm)	1.000	2.50	5.53	3.25	.184										
-1299-X3N	●		1.299 (33mm)	1.250	3.90	7.15	4.87	.184										
-1312	●		1.312	1.000	2.50	5.53	3.25	.185										
-1312-X3N	●		1.312	1.250	3.94	7.16	4.88	.185										
-1339	●		1.339 (34mm)	1.000	2.50	5.53	3.25	.189										
-1339-X3N	●		1.339 (34mm)	1.250	4.02	7.27	4.99	.189										
-1344	●		1.344	1.000	2.50	5.53	3.25	.190										
-1344-X3N	●		1.344	1.250	4.03	7.25	4.97	.190										
-1375	●		1.375	1.000	2.50	5.53	3.25	.193										
DR -1375-X3N	●		2	1.375	1.250	4.12	7.34	5.06						2.28	.193	SCR30	T10	WCMX 06T308-M1(A)
-1406	●	1.406		1.000	2.75	5.78	3.50	.197										
-1406-X3N	●	1.406		1.250	4.22	7.45	5.17	.197										
-1417	●	1.417 (36mm)		1.000	2.75	5.78	3.50	.199										
-1417-X3N	●	1.417 (36mm)		1.250	4.25	7.52	5.24	.199										
-1437	●	1.437		1.000	2.75	5.78	3.50	.196										
-1437-X3N	●	1.437		1.250	4.31	7.54	5.26	.196										
-1457	●	1.457 (37mm)		1.000	2.75	5.78	3.50	.199										
-1457-X3N	●	1.457 (37mm)		1.250	4.37	7.64	5.36	.199										
-1469	●	1.469		1.000	2.75	5.78	3.50	.200										
-1469-X3N	●	1.469		1.250	4.40	7.63	5.35	.200										