

для заказа - kyocera@kyocera-tools.ru

CTGP (External)




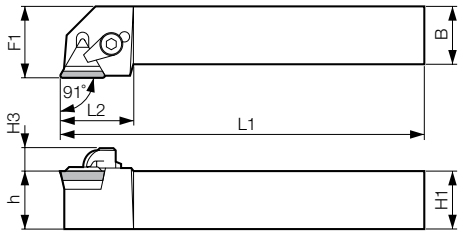


• Right-hand Shown

Side Rake Angle : + 6°
Inclination Angle : 0°

CTFP (Facing)




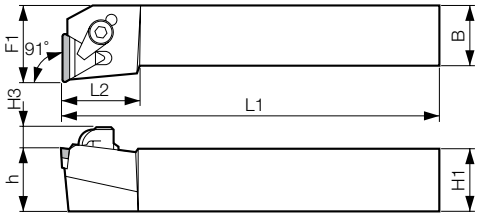


• Right-hand Shown

Side Rake Angle : + 6°
Inclination Angle : 0°

CTTP (External / Chamfering)



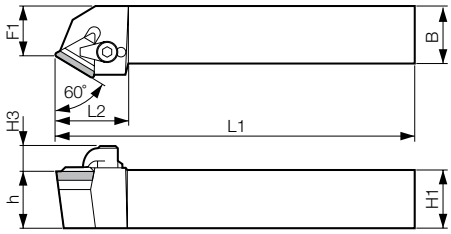

• Right-hand Shown

Side Rake Angle : + 6°
Inclination Angle : 0°

Toolholder Dimensions

Part Number		Stock		Dimensions (mm)						Standard Corner-R(rε)	Spare Parts				
											Clamp Set	Wrench	Shim	Shim Screw	*Chipbreaker
		R	L	H1=h	H3	B	L1	L2	F1						
CTGP□	1212F-11N	○	○	12	8.0	12	80	18.0	16	0.4	CPS-2P	LW-2.5	-	-	CB-T2212
	1616H-11N	○	○	16	8.0	16	100	18.0	20						
CTGP□	2020K-16N	○	○	20	8.5	20	125	26.0	25	0.8	CPS-3	LW-3	KPT-32	SP3X8	CB-T3220
	2525M-16N	○	○	25	8.5	25	150	26.0	32						
CTFP□	1212F-11N	○	○	12	8.0	12	80	18.0	16	0.4	CPS-2P	LW-2.5	-	-	CB-T2212
	1616H-11N	○	○	16	8.0	16	100	18.0	20						
CTFP□	2020K-16N	○	○	20	8.5	20	125	22.0	25	0.8	CPS-3	LW-3	KPT-32	SP3X8	CB-T3220
	2525M-16N	○	○	25	8.5	25	150	22.0	32						
CTTP□	1212F-11N	○	○	12	8.0	12	80	22.5	9	0.4	CPS-2P	LW-2.5	-	-	CB-T2212
	1616H-11N	○		16	8.0	16	100	22.5	13						
CTTP□	2020K-16N	○		20	8.5	20	125	28.0	17	0.8	CPS-3	LW-3	KPT-32	SP3X8	CB-T3220
	2525M-16N	○	○	25	8.5	25	150	28.0	22						

* Chipbreaker is not included. Purchase separately.

Applicable Inserts

Application	Finishing	Finishing	Finishing-Medium	Medium	Medium	Finishing-Medium	Cast Iron	Cast Iron	Non-ferrous Metals	Hard Materials
Ref. Page	B75	B75	B75	B75	B75	B76	B76	B97	C29	C18
Insert / Toolholder	GP	DP	HQ	G	Standard	□	Without Chipbreaker	Ceramic	PCD	CBN
										
CTGP□...-11N	TPMR22..	TPMR22..	TPMR22..	TPMR22..	TPMR22..	TPGR22..	TPMN22.. TPGN22..	TPGN22..	TPGN22..	TPGN22..
CTGP□...-16N	TPMR32..	TPMR32..	TPMR32..	TPMR32..	TPMR32..	TPGR32..	TPMN32.. TPGN32..	TPGN32..	TPGN32..	TPGN32..
CTFP□...-11N	TPMR22..	TPMR22..	TPMR22..	TPMR22..	TPMR22..	TPGR22..	TPMN22.. TPGN22..	TPGN22..	TPGN22..	TPGN22..
CTFP□...-16N	TPMR32..	TPMR32..	TPMR32..	TPMR32..	TPMR32..	TPGR32..	TPMN32.. TPGN32..	TPGN32..	TPGN32..	TPGN32..
CTTP□...-11N	TPMR22..	TPMR22..	TPMR22..	TPMR22..	TPMR22..	TPGR22..	TPMN22.. TPGN22..	TPGN22..	TPGN22..	TPGN22..
CTTP□...-16N	TPMR32..	TPMR32..	TPMR32..	TPMR32..	TPMR32..	TPGR32..	TPMN32.. TPGN32..	TPGN32..	TPGN32..	TPGN32..

· CTFP□: Left-hand Insert for Right-hand Toolholder, Right-hand Insert for Left-hand Toolholder.

Recommended Cutting Conditions E46

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)