для заказа - kyocera@kyocera-tools.ru

EZH-HP (Sleeve)

Adjustable

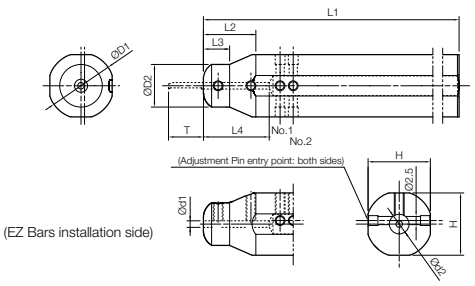


Fig.1

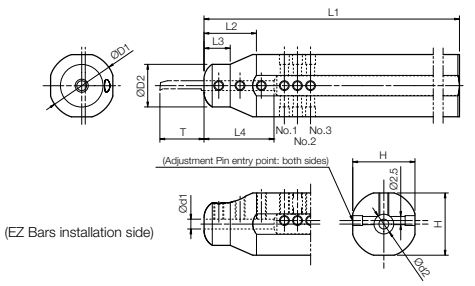


Fig.2

Part Number		Stock	Dimensions (mm)									T (mm) Overhang Length of Bar ※2				Drawing	Applicable EZ Bar → F16~F18 → F21 → G48, G76 → J28
			Ød1	ØD1	ØD2	Ød2	H	L1	L2	L3	※1L4	Adjustment Pin Setting Position No.1	No.2	No.3	No.4		
EZH	01716HP-100	○	1.7	16	13	6	15.0	100	16	8	16	7.5	3.5	-	-	Fig.1	EZBR…017…
	01719HP-120	●	1.7	0.75"	13	6	18.0	120	16	8	16						
	01720HP-120	○	1.7	20	13	6	19.0	120	16	8	16						
	01722HP-135	○	1.7	22	13	6	21.0	135	16	8	16						
	01725.0HP-135	○	1.7	25	13	6	24.0	135	16	8	16						
	01725.4HP-120	●	1.7	1.00"	13	6	24.4	120	16	8	16						
EZH	02016HP-100	○	2.0	16	13	6	15.0	100	16	8	20	8.5	4.5	-	-	Fig.1	EZBR…020… ※3 HPB R/L 0202-...
	02019HP-120	●	2.0	0.75"	13	6	18.0	120	16	8	20						
	02020HP-120	○	2.0	20	13	6	19.0	120	16	8	20						
	02022HP-135	○	2.0	22	13	6	21.0	135	16	8	20						
	02025.0HP-135	○	2.0	25	13	6	24.0	135	16	8	20						
	02025.4HP-120	●	2.0	1.00"	13	6	24.4	120	16	8	20						
EZH	02516HP-100	○	2.5	16	13	6	15.0	100	16	8	20	11.0	7.0	-	-	Fig.1	EZBR…025… EZTR…025-…
	02519HP-120	●	2.5	0.75"	13	6	18.0	120	16	8	20						
	02520HP-120	○	2.5	20	13	6	19.0	120	16	8	20						
	02522HP-135	○	2.5	22	13	6	21.0	135	16	8	20						
	02525.0HP-135	○	2.5	25	13	6	24.0	135	16	8	20						
	02525.4HP-120	●	2.5	1.00"	13	6	24.4	120	16	8	20						
EZH	03016HP-100	○	3.0	16	13	6	15.0	100	16	8	21	13.5	9.5	5.5	-	Fig.2	EZBR…030… EZVBR035030-... EZGR…030-… EZTR…030-… ※3 HPB R/L 0303-...
	03019HP-120	●	3.0	0.75"	13	6	18.0	120	16	8	21						
	03020HP-120	○	3.0	20	13	6	19.0	120	16	8	21						
	03022HP-135	○	3.0	22	13	6	21.0	135	16	8	21						
	03025.0HP-135	○	3.0	25	13	6	24.0	135	16	8	21						
	03025.4HP-120	●	3.0	1.00"	13	6	24.4	120	16	8	21						
EZH	03516HP-100	○	3.5	16	13	6	15.0	100	16	8	22	15.5	11.5	7.5	-	Fig.2	EZBR…035… EZTR…035…
	03519HP-120	●	3.5	0.75"	13	6	18.0	120	16	8	22						
	03520HP-120	○	3.5	20	13	6	19.0	120	16	8	22						
	03522HP-135	○	3.5	22	13	6	21.0	135	16	8	22						
	03525.0HP-135	○	3.5	25	13	6	24.0	135	16	8	22						
	03525.4HP-120	●	3.5	1.00"	13	6	24.4	120	16	8	22						
EZH	04016HP-100	○	4.0	16	13	6	15	100	16	8	24	20.5	16.5	12.5	8.5	Fig.4 (F23)	EZBR…040… EZVBR045040-... EZGR…040-… EZFGR…040-… EZTR…040-… ※3 HP…04-…
	04019HP-120	●	4.0	19.05	13	6	18	120	16	8	24						
	04020HP-120	○	4.0	20	13	6	19	120	16	8	24						
	04022HP-135	○	4.0	22	13	6	21	135	16	8	24						
	04025.0HP-135	○	4.0	25	13	6	24	135	16	8	24						
	04025.4HP-120	●	4.0	25.4	13	6	24.4	120	16	8	24						

※1: L4 shows Ød1 length
※2: Dimension T shows overhang length of the EZB Bar when attached to sleeve.
※3: HP type bars are not adjustable.
• Choose sleeves (Ød1) to match ØD dimension of bar.

Spare Parts (for EZH-HP Sleeves)

Part Number		Spare Parts					Applicable EZB Bar and EZ Bar PLUS	
		Clamp Screw	Wrench	Clamp Screw	Wrench	Adjustment Pin		
EZH	017...HP-..	HS3X4P (for adjustment pin and bar)	LW-1.5 Tightening Torque 1N • m	-	-	LCP025140	EZBR…017…	
	020...HP-..						EZBR…020…	
	025...HP-..						EZBR…025…	EZ_R…025-…
	030...HP-..						EZBR…030…	EZ_R…030-…
EZH	035...HP-..	HS3X4P (only for adjustment pin)	LW-1.5 Tightening Torque 1N • m	HS4X4P (for bar)	LW-2 Tightening Torque 2N • m	LCP025140	EZBR…035…	EZ_R…035-…
	040...HP-..						EZBR…040…	EZ_R…040-…
	045...HP-..						_045X-…-050EZ	
	050...HP-..						EZBR…050…	EZ_R…050-…
	060...HP-..						EZBR…060…	EZ_R…060-…
							_060X-…-070EZ	
	070...HP-..						EZBR…070…	EZ_R…070-…

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

U.S. Stock Standard : ●
World Express (Shipping: 7-10 Business Days) : ○