
для заказа - kyocera@kyocera-tools.ru


KTKTB (Separate Toolblock Holder)





KTKTBF (Separate Toolblock Holder / Perpendicular Type)

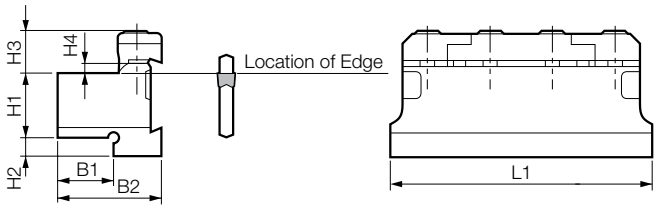

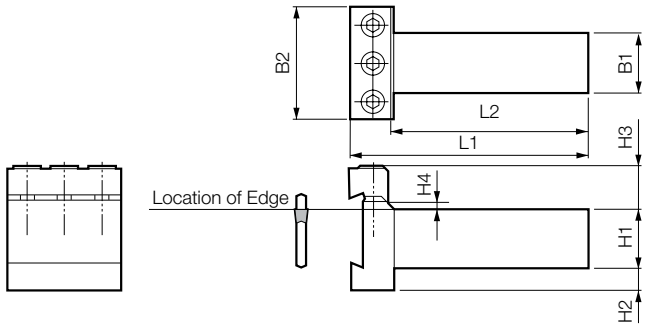



Toolblock Dimensions

Part Number		Stock	Dimensions (mm)								Spare Parts				Applicable Blade	
											Clamp Set		Screw	Wrench	Cut-Off	Face Grooving
			H1	H2	H3	H4	B1	B2	L1	L2	Separate Type	Integral Type			H28	G121
KTKTB	16-19	○	16	4	12	2	15.5	29.5	76	-	-	BCS-1	HH5X25	LW-4	KTKB19-○S KTKB19-1SS	-
	20-19	○	20	4	12	2	19	34	76	-						
	16-26	○	16	13	14	2.5	15.5	31.5	86	-	BCS-2	-	HH6X30	LW-5	KTKB26-○S KTKB26-1SS	-
	20-26	○	20	9	14	2.5	19	36	86	-						
	20-32	○	20	13	17	3.5	19	38	100	-	BCS-3	-	HH6X30	LW-5	KTKB32-○S KTKB32-1SS KTKB□32-○S	KTKB□○○○○-4S KTKB□○○○○-5S
	25-32	○	25	8	17	3.5	23	42	110	-	BCS-4					
	32-32	○	32	5	17	3.5	29	48	110	-						
KTKTBF	25-32	○	25	9.5	17	3.5	25	48	102	84.5	-	BCS-5	HH6X30	LW-5	KTKB32-○S KTKB32-1SS KTKB□32-○S	KTKB□○○○○-4S KTKB□○○○○-5S
	32-32	○	32	2.5	17	3.5	32	48	117	99.5						


Recommended Cutting Condtions ➔ H32

Mounting the Toolblock

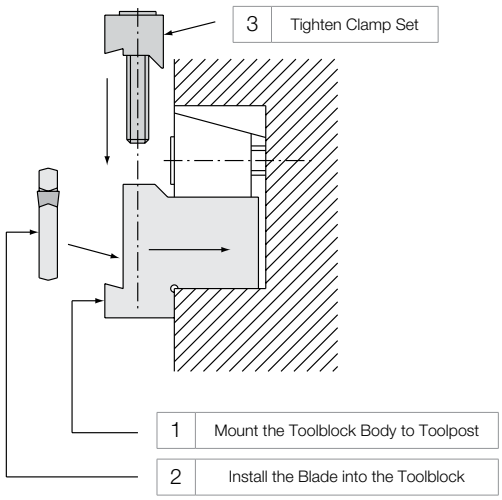

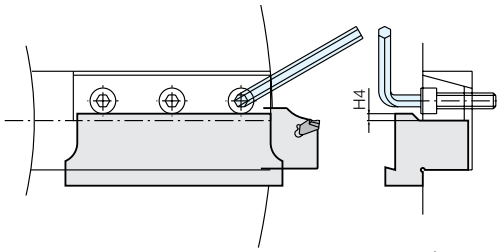

When mounting the toolblock on a small lathe, the space to tighten the clamp bolt may be narrow due to the H4 dimension.

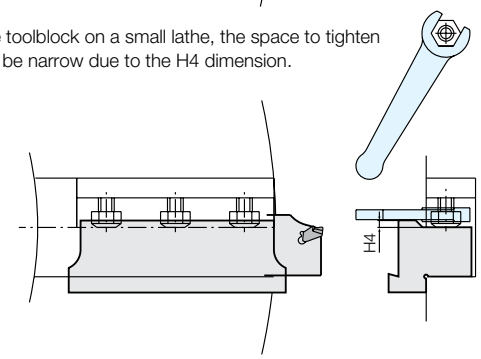

kyocera@kyocera-tools.ru
www.kyocera-tools.ru

● : U.S. Stock Standard
○ : World Express (Shipping: 7-10 Business Days)