


**SPECIAL EXTENSION TAPS**

Ground Thread

(Ref. USCTI Table 303-A)

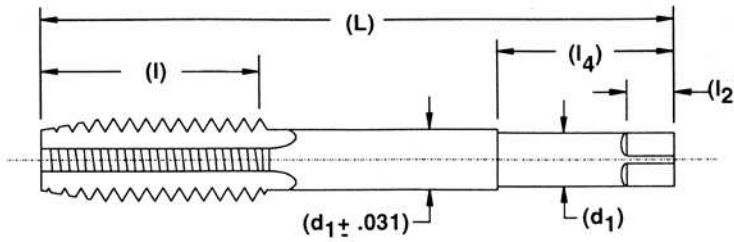

Unless otherwise specified, special extension taps will be furnished with dimensions and tolerances as shown for Machine Screw and Fractional taps in Tables 302 and 303, and for Pipe taps in Table 311.

Exceptions:

1. Types of centers are optional with manufacturer.
2. Tolerances on shank diameter  $d_1$  for  $l_4$  length as shown in the following table.
3. Shank eccentricity tolerance in Table 317 applies only to the  $l_4$  length shown in the following table.
4. Length of Close Tolerance Shank, ( $L_4$ ) is minimum.

Nominal Tap Size		Thread Length $l$	Shank Dia. $d_1$	Square Length $l_2$	Size of Square	Ground Shank Length $l_4$
Fractional	Machine Screw					
-	6	0.688	0.141	0.188	0.110	1.13
-	8	0.750	0.168	0.250	0.131	1.25
-	10 - 12	0.875	0.194	0.250	0.152	1.38
1/4	14	1.000	0.255	0.313	0.191	1.50
1/4*	-	1.000	0.185	0.250	0.138	Full Length
5/16	-	1.130	0.318	0.375	0.238	1.56
5/16*	-	1.130	0.240	0.281	0.180	Full Length
3/8	-	1.250	0.381	0.438	0.286	1.63
3/8*	-	1.250	0.275	0.375	0.206	Full Length
7/16	-	1.440	0.323	0.406	0.242	1.69
1/2	-	1.660	0.367	0.438	0.275	1.69
9/16	-	1.660	0.429	0.500	0.322	1.88
5/8	-	1.810	0.480	0.563	0.360	2.00
3/4	-	2.000	0.590	0.688	0.442	2.25
7/8	-	2.220	0.697	0.750	0.523	2.50
1	-	2.500	0.800	0.813	0.600	2.63
1-1/8	-	2.560	0.896	0.875	0.672	2.75
1-1/4	-	2.560	1.021	1.000	0.766	2.88
1-3/8	-	3.000	1.108	1.063	0.831	3.00
1-1/2	-	3.000	1.233	1.125	0.925	3.00

\* Small Shank

Tolerances  
for Shank Diameter,  $d_1$  and  $l_4$  length

Size Range		Direction	Tolerance (in)
Fractional	Machine Screw		
1/4 to 5/8 incl.	0 - 14 incl.	Minus	0.003
11/16 to 1-1/2 incl.		Minus	0.004

DRILLS  
END MILLS  
ROUTERS  
THREAD MILLS & TAPS  
ENGRAVERS  
BORING BARS  
REAMERS  
SAWS  
TECHNICAL  
INDEX