


# 3.00mm SHANK

MICRO DRILLS

0.34mm - 0.54mm DIAMETER

Mirror Surface Finishes  
Sub Micron Grain Carbide

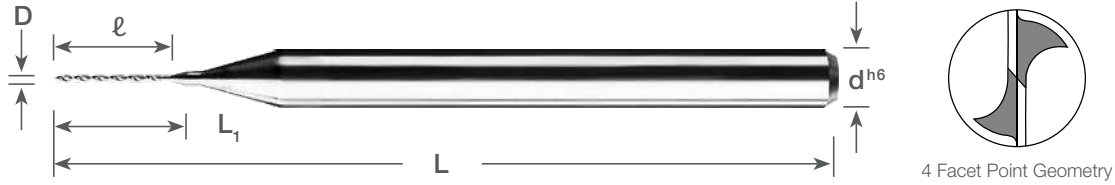

Symbol Descriptions Page 7

## STANDARD Flute Length

Dimensions (mm)					Uncoated		AlTiN Coating	
D <sup>+0.000mm -0.008mm</sup>	d <sup>h6</sup>	ℓ	L	L <sub>1</sub>	Part Number	Stock	Part Number	Stock
0.34	3	5.70	38	5.90	226-0134.225	●	226-0134L225	●
0.35	3	5.70	38	5.90	226-0138.225	●	226-0138L225	●
0.36	3	5.70	38	5.90	226-0142.225	●	226-0142L225	●
0.37	3	5.70	38	5.90	226-0146.225	●	226-0146L225	●
0.38	3	6.40	38	6.60	226-0150.250	●	226-0150L250	●
0.39	3	6.40	38	6.60	226-0154.250	●	226-0154L250	●
0.40	3	6.40	38	6.60	226-0157.250	●	226-0157L250	●
0.41	3	6.40	38	6.60	226-0161.250	●	226-0161L250	●
0.42	3	6.40	38	6.60	226-0165.250	●	226-0165L250	●
0.43	3	6.40	38	6.60	226-0169.250	●	226-0169L250	●
0.44	3	6.40	38	6.60	226-0173.250	●	226-0173L250	●
0.45	3	6.40	38	6.60	226-0177.250	●	226-0177L250	●
0.46	3	6.40	38	6.60	226-0181.250	●	226-0181L250	●
0.47	3	6.40	38	6.60	226-0185.250	●	226-0185L250	●
0.48	3	6.60	38	6.80	226-0189.260	●	226-0189L260	●
0.49	3	6.60	38	6.80	226-0193.260	●	226-0193L260	●
0.50	3	6.60	38	6.80	226-0197.260	●	226-0197L260	●
0.51	3	6.60	38	6.80	226-0201.260	●	226-0201L260	●
0.52	3	6.60	38	6.80	226-0205.260	●	226-0205L260	●
0.53	3	6.60	38	6.80	226-0209.260	●	226-0209L260	●
0.54	3	6.60	38	6.80	226-0213.260	●	226-0213L260	●

SERIES 226 WORKPIECE MATERIAL															
Coating	P Steel ~30HRC	P Steel 30-40HRC	H Hardened Steel ~55HRC	H Hardened Steel ~68HRC	M Stainless Steel	K Cast Iron	N Aluminum	N Graphite	N Copper Alloy	N CFRP	N Plastic	N Thermoset Plastic	N High Density Plastic	S Nickel / Cobalt	S Titanium Alloy
AlTiN	★	★	★	★	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
Uncoated							☆	☆	★	☆	★	★	★		☆

★ : Priority ☆ : Applicable Materials

Symbol Descriptions Page 7