


### 3.00mm SHANK

LEFT HAND MICRO DRILLS

0.04mm - 0.33mm DIAMETER

Mirror Surface Finishes  
Sub Micron Grain Carbide

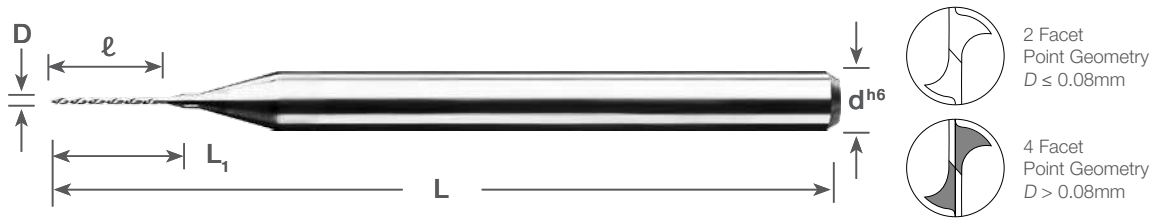

Symbol Descriptions Page 7

### STANDARD Flute Length

Dimensions (mm)					Uncoated		AlTiN Coating	
D <sup>+0.000mm -0.008mm</sup>	d <sup>h6</sup>	ℓ	L	L <sub>1</sub>	Part Number	Stock	Part Number	Stock
0.04	3	0.50	38	0.50	226L-0016.020	■	-	-
0.05	3	0.80	38	0.80	226L-0020.030	■	-	-
0.06	3	0.80	38	0.80	226L-0024.030	■	-	-
0.07	3	1.30	38	1.30	226L-0028.050	■	-	-
0.08	3	1.30	38	1.30	226L-0031.050	■	-	-
0.09	3	1.30	38	1.30	226L-0035.050	■	-	-
0.10	3	1.00	38	1.20	226L-0039.040	■	-	-
0.11	3	1.00	38	1.20	226L-0043.040	■	-	-
0.12	3	1.00	38	1.20	226L-0047.040	■	-	-
0.13	3	1.00	38	1.20	226L-0051.040	■	-	-
0.14	3	2.00	38	2.20	226L-0055.080	■	-	-
0.15	3	2.00	38	2.20	226L-0059.080	■	-	-
0.16	3	2.00	38	2.20	226L-0063.080	■	-	-
0.17	3	2.00	38	2.20	226L-0067.080	■	-	-
0.18	3	2.50	38	2.70	226L-0071.100	■	-	-
0.19	3	2.50	38	2.70	226L-0075.100	■	-	-
0.20	3	2.50	38	2.70	226L-0079.100	■	-	-
0.21	3	2.50	38	2.70	226L-0083.100	■	-	-
0.22	3	2.50	38	2.70	226L-0087.100	■	-	-
0.23	3	3.80	38	4.00	226L-0091.150	■	-	-
0.24	3	3.80	38	4.00	226L-0094.150	■	-	-
0.25	3	3.80	38	4.00	226L-0098.150	■	-	-
0.26	3	3.80	38	4.00	226L-0102.150	■	-	-
0.27	3	3.80	38	4.00	226L-0106.150	■	-	-
0.28	3	3.80	38	4.00	226L-0110.150	■	-	-
0.29	3	3.80	38	4.00	226L-0114.150	■	-	-
0.30	3	5.70	38	5.90	226L-0118.225	■	226L-0118L225	■
0.31	3	5.70	38	5.90	226L-0122.225	■	226L-0122L225	■
0.32	3	5.70	38	5.90	226L-0126.225	■	226L-0126L225	■
0.33	3	5.70	38	5.90	226L-0130.225	■	226L-0130L225	■

### SERIES 226L WORKPIECE MATERIAL

Coating	P Steel ~30HRC	P Steel 30-40HRC	H Hardened Steel ~55HRC	H Hardened Steel ~68HRC	M Stainless Steel	K Cast Iron	N Aluminum	N Graphite	N Copper Alloy	N CFRP	N Plastic	N Thermoset Plastic	N High Density Plastic	S Nickel / Cobalt	S Titanium Alloy
AlTiN	★	★	★	★	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
Uncoated							☆	☆	★	☆	★	★	★		☆

★ : Priority ☆ : Applicable Materials

Symbol Descriptions Page 7