



Description Identification System (Toolholder)

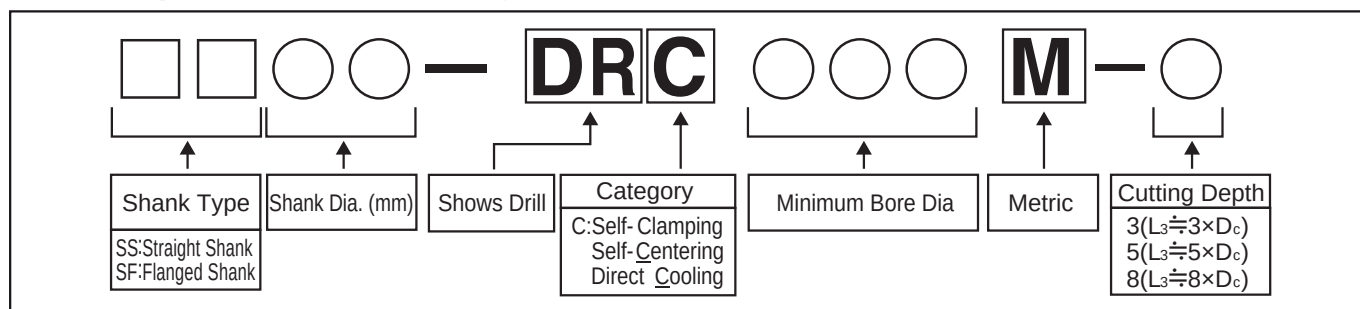

SS-DRC (Cutting Depth: 3×D)

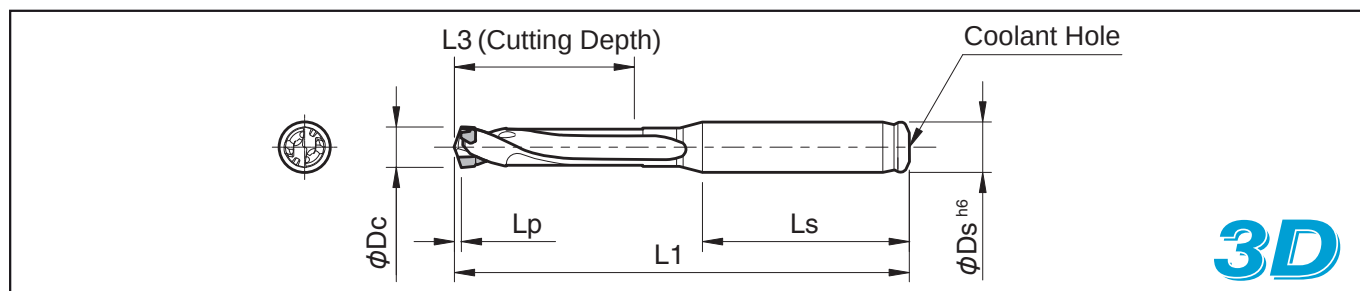

• For Lp indicates distance from drill point to corner edge, see [K4-K6](#)

Toolholder Dimensions

Description		Std.	Dimension (mm)					Spare Parts	Applicable Inserts 🔵K4~K6	Applicable chamfering Holder and Insert description		
			Applicable Insert Dia. øDc		øDs (h6)	L1	L3	Ls		Wrench 🔵K9	Holder	Insert
			min.	max.								
SS10- DRC080M-3	●	7.94	8.49	10	79	25.5	40	WDRC8 (WDRC17)	DC0794M-SC~DC0840M-SC	S20-CH10	CT08T2-45A	
	●	8.50	8.99		81	27.0			DC0850M-SC~DC0890M-SC			
	●	9.00	9.49		83	28.5			DC0900M-SC~DC0940M-SC			
	●	9.50	9.99		85	30.0			DC0950M-SC~DC0990M-SC			
SS12- DRC100M-3	●	10.00	10.49	12	92	31.5	45	WDRC10 (WDRC17)	DC1000M-SC~DC1040M-SC	S32-CH12	CT12T3-45A	
	●	10.50	10.99		94	33.0			DC1050M-SC~DC1090M-SC			
	●	11.00	11.49		96	34.5			DC1100M-SC~DC1140M-SC			
	●	11.50	11.99		98	36.0			DC1150M-SC~DC1190M-SC			
SS14- DRC120M-3	●	12.00	12.49	14	101	37.5	48	WDRC12 (WDRC17)	DC1200M-SC~DC1240M-SC	S32-CH14	CT12T3-45A	
	●	12.50	12.99		103	39.0			DC1250M-SC~DC1290M-SC			
	●	13.00	13.49		105	40.5			DC1300M-SC~DC1340M-SC			
	●	13.50	13.99		107	42.0			DC1350M-SC~DC1390M-SC			
SS16- DRC140M-3	●	14.00	14.49	16	112	43.5	48	WDRC14 (WDRC17)	DC1400M-SC~DC1440M-SC	S32-CH16	CT12T3-45A	
	●	14.50	14.99		114	45.0			DC1450M-SC~DC1490M-SC			
	●	15.00	15.99		118	48.0			DC1500M-SC~DC1580M-SC			
SS18- DRC160M-3	●	16.00	16.99	18	122	51.0	49	WDRC14 (WDRC17)	DC1600M-SC~DC1690M-SC	S32-CH18	CT12T3-45A	
	●	17.00	17.99		127	54.0			DC1700M-SC~DC1790M-SC			
SS20- DRC180M-3	●	18.00	18.99	20	133	57.0	51	WDRC17	DC1800M-SC~DC1890M-SC	-	-	
	●	19.00	19.99		137	60.0			DC1900M-SC~DC1990M-SC			
SS25- DRC200M-3	●	20.00	20.99	25	147	63.0	57	WDRC17	DC2000M-SC~DC2099M-SC	-	-	

● : Std. Item ○ : Check Availability R : Std. Item (R-hand Only) L : Std. Item (L-hand Only)